

W Walker
Edison
furniture company

Item # :BTSQTOT
Assembly Instructions



*To request missing, lost or broken parts,, or for any other customer service issues,
please visit our website at www.walkeredison.com or call us at 877-207-5906.*

Revised 03/2016




Instruction Manual











IMPORTANT INFORMATION MUST READ BEFORE ASSEMBLING PRODUCT


- Follow the information on the warnings appearing on the upper bunk end structure and on the carton. Do not remove warning label from bed.
- Use only a mattress which is 75" L x 38.5"W x 9"H on the lower bunk.
- Use only a mattress which is 75" L x 38.5"W x 7"H on the upper bunk.
- Replacement Parts—Replacement parts, including additional guardrails, may be obtained from any of Walker Edison Furniture's dealers or by contacting Walker Edison Furniture online at www.walkeredison.com.
- Follow the information on the warnings appearing on the upper bunk end structure and on the carton. DO NOT remove warning label from bed.
- Always use the recommended size mattress or mattress support, or both, to help prevent the likelihood of entrapment or falls.
- Surface of mattress must be at least 5 in. (127mm) below the upper edge of guardrails. Mattress must not exceed a maximum thickness of 7 inches.
- DO NOT allow children under 6 years of age to use the upper bunk.
- Periodically check and ensure that the guardrail, ladder, and other components are in their proper position, free from damage, and that all connectors are tight.
- DO NOT allow horseplay on or under the bed and prohibit jumping on the bed.
- Always use the ladder for entering and leaving the upper bunk.
- DO NOT use substitute parts. Contact the manufacturer or dealer for replacement parts.
- Use of a night light may provide added safety precaution for a child using the upper bunk.
- Always use guardrails on both long sides of the upper bunk. If the bunk bed will be placed next to the wall, the guardrail that runs the full length of the bed should be placed against the wall to prevent entrapment between the bed and wall.
- The use of water or sleep flotation mattresses is prohibited.
- STRANGULATION HAZARD—Never attach or hang items to any part of the bunk bed that are not designed for use with the bed; for example, but not limited to, hooks, belts and jump ropes.
- Prohibit more than one person on upper bunk.
- Keep these instructions for future reference.

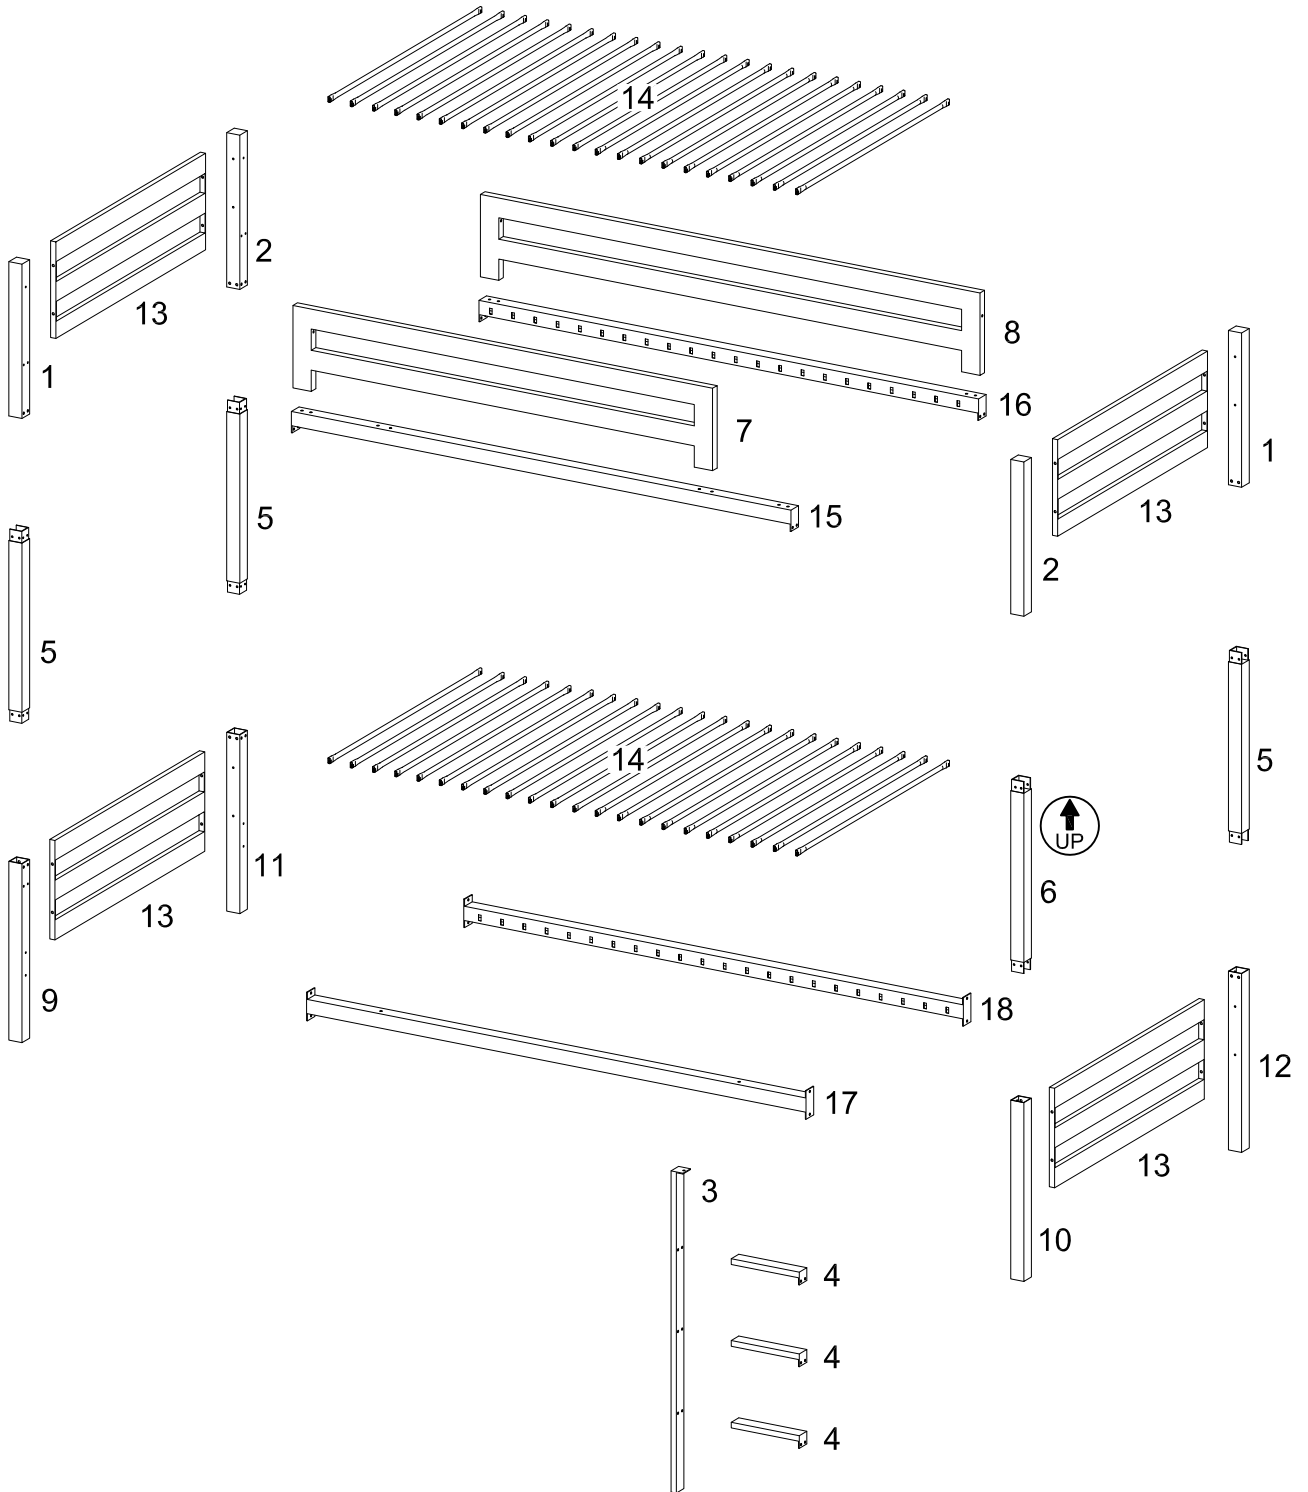Parts List



Hardware List

A		Ø1/4"×3-3/8"	Bolt	3 pcs
B		Ø1/4"×2-3/4"	Bolt	9 pcs
C		Ø1/4"×1-1/2"	Bolt	6 pcs
D		Ø1/4"×5/8"	Bolt	42 pcs
E		Ø1/4"×3/8"	Bolt	32 pcs
F		Ø16mm	Washer	89 pcs
G			Plastic link	42 pcs
H			Plastic plug	20 pcs
J			Plastic end cap	8 pcs
K			Plastic tab lock	88 pcs
L		M4mm	Wrench	1 pc



Philips head screwdriver required for assembly
(not included)


*The hardware quantities listed above are required for proper assembly.
Some extra hardware may also have been included.*

THREE ASSEMBLY OPTIONS

Option A

(Ladder Right)


To build this option follow steps 1 - 4,
then follow step 5A - 12A .

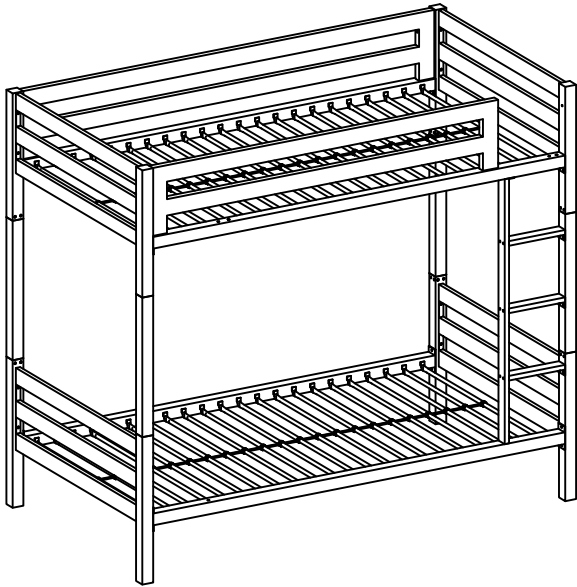

Option B

(Ladder Lift)



To build this option follow steps 1- 4,
then follow step 5B - 12B .

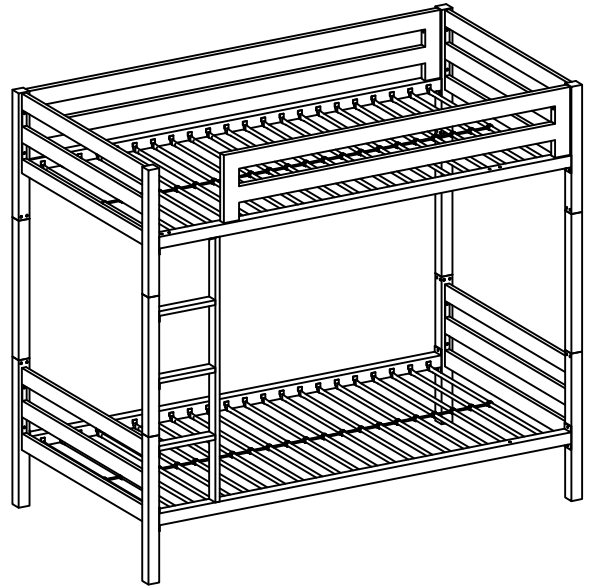


Option C

(Two single beds)

To build this option follow steps 1-12,
then follow step 13 -18 .

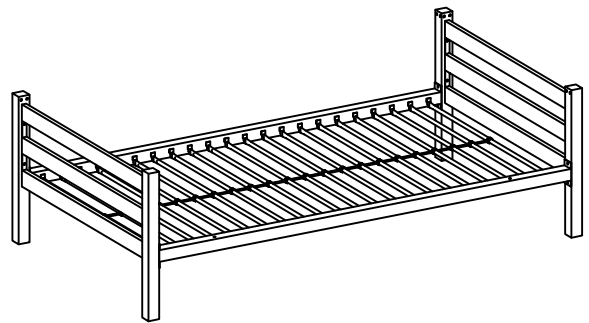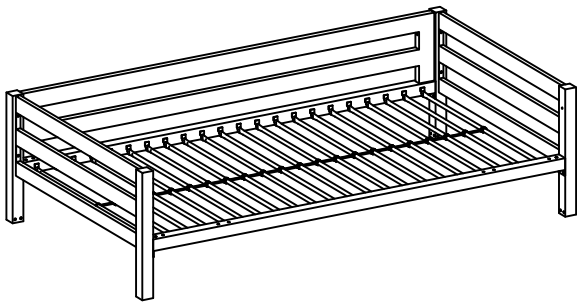


Step 1

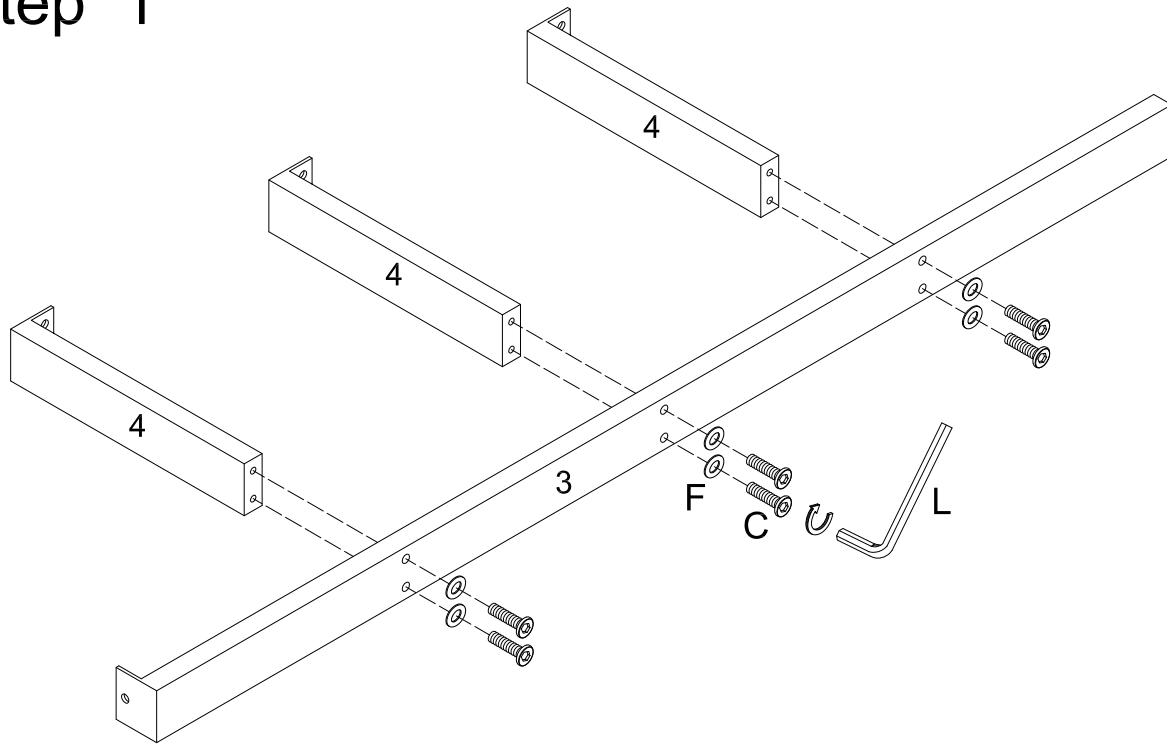


Attach the ladder steps (4) to the ladder support posts (3) using bolts (C) and washers (F) as shown in the illustration.

Step 2

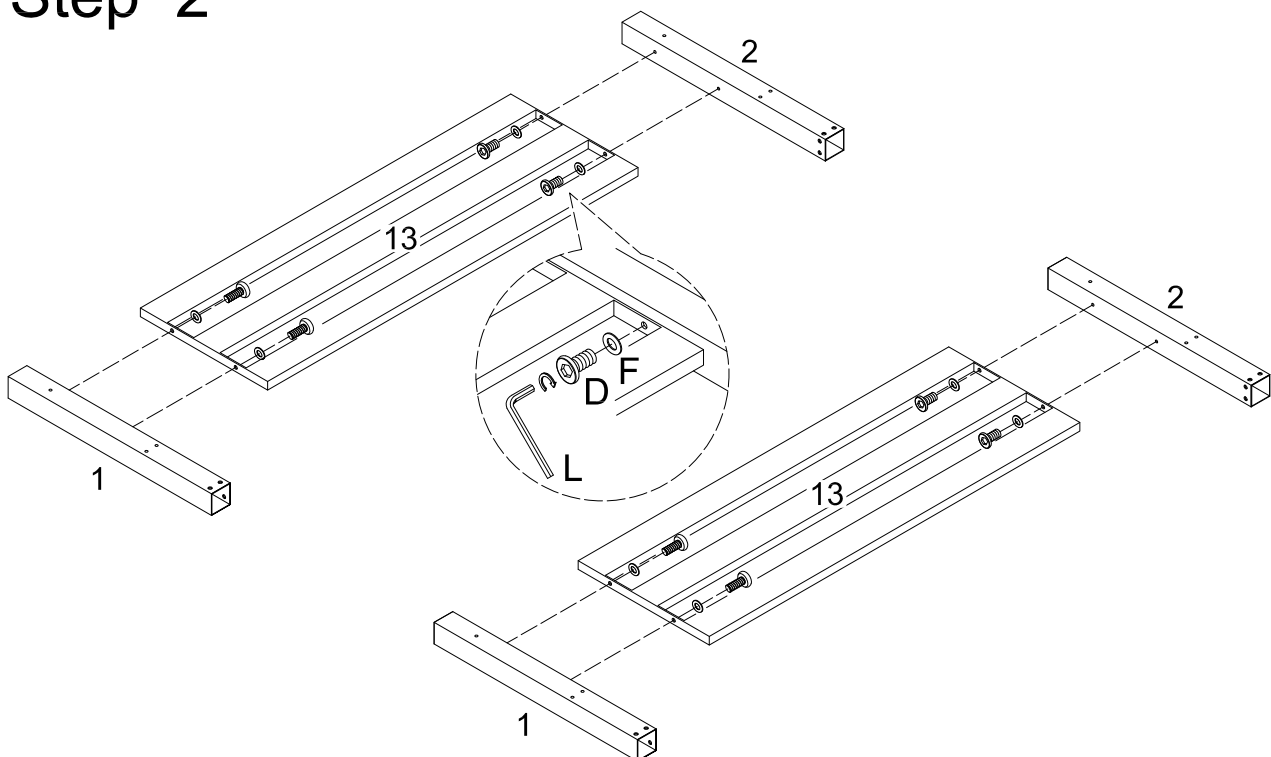


Secure guardrails (13) to the supports posts (1,2,) using bolts (D) and washers (F) as shown in the illustration. Be sure to tighten firmly using wrench (L).

Step 3

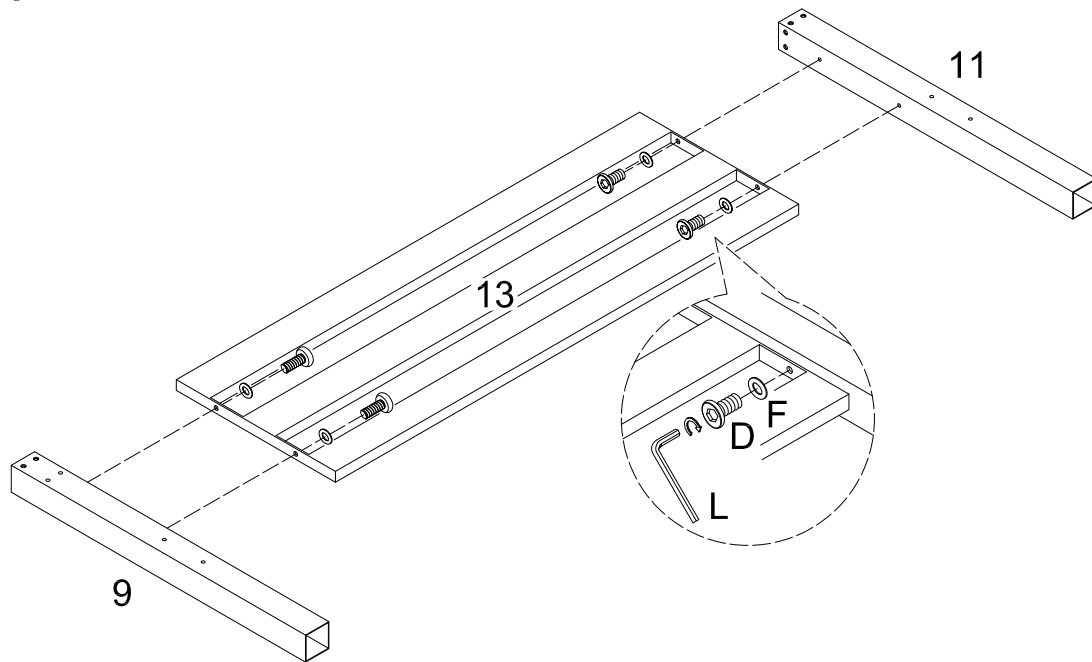


Secure guardrails (13) to the supports posts (9,11) using bolts (D) and washers (F) as shown in the illustration. Be sure to tighten firmly using wrench (L).

Step 4

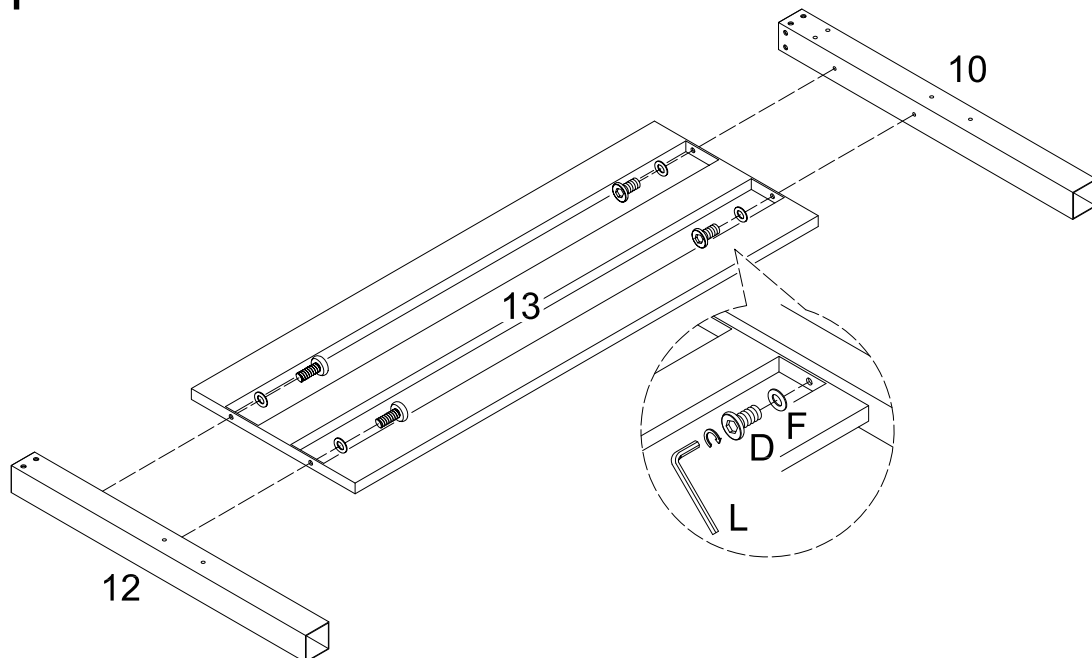


Secure guardrails (13) to the supports posts (10,12) using bolts (D) and washers (F) as shown in the illustration. Be sure to tighten firmly using wrench (L).

Step 5A

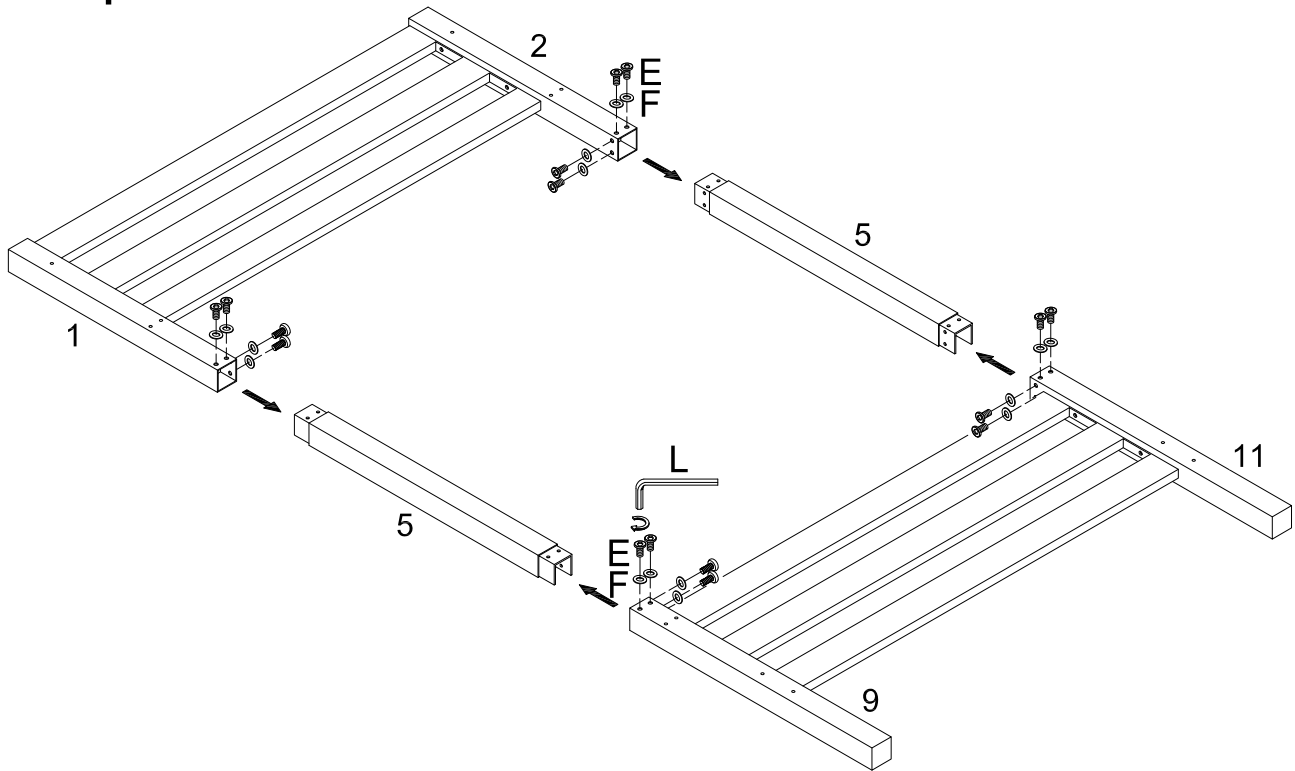


Assembly the three support posts by combining parts (1,5) and (9) ; then parts (2,5) and (11) as shown in the illustration. Secure these parts together using bolts (E) and washers (F). Be sure to tighten firmly using wrench (L).

Step 6A

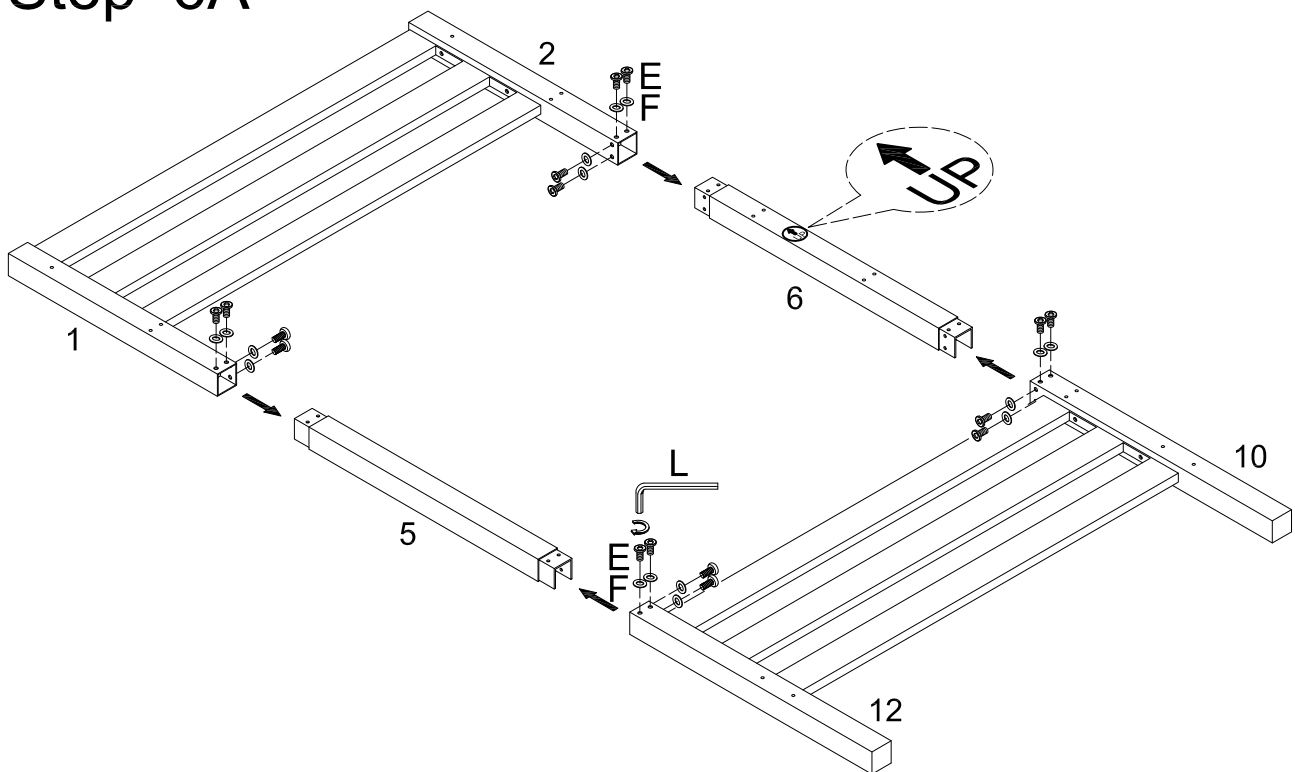


Assembly the three support posts by combining parts (1,5) and (12) ; then parts (2,6) and (10) as shown in the illustration. Secure these parts together using bolts (E) and washers (F). Be sure to tighten firmly using wrench (L).

Step 7A

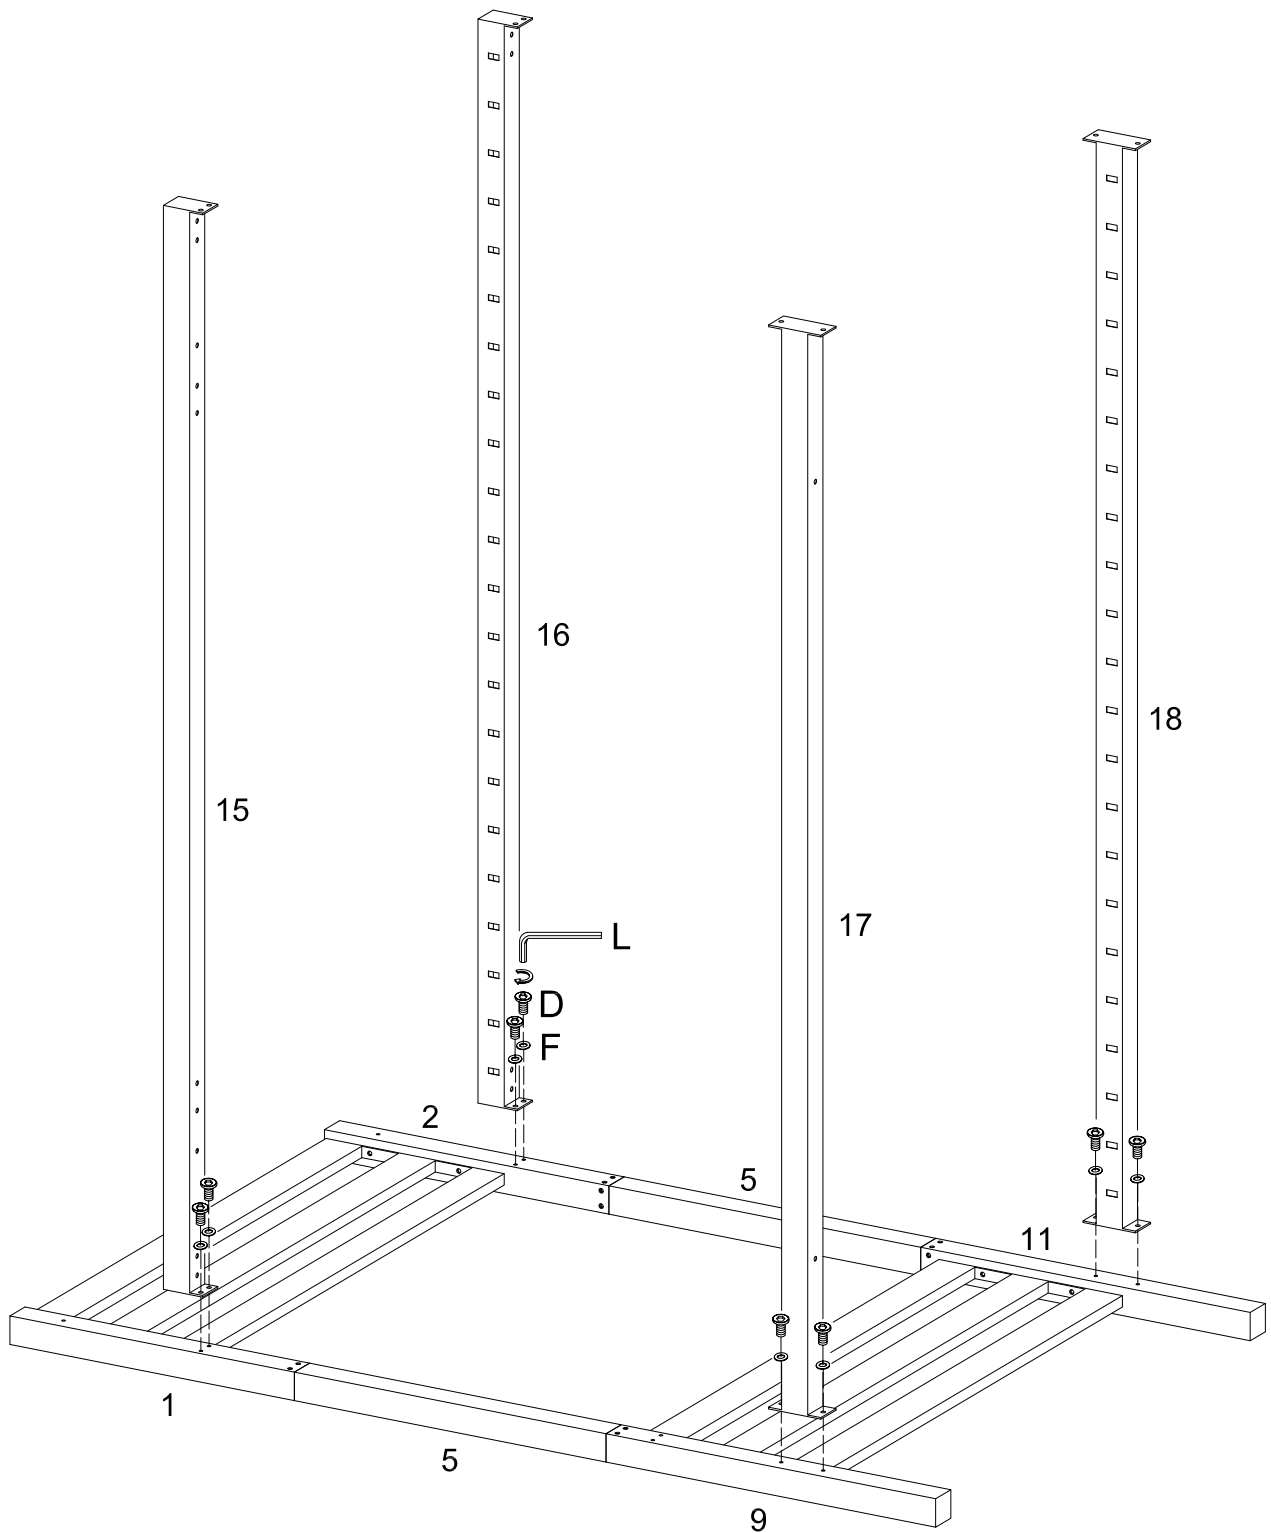


Attach lower cross bars (17,18) and upper cross bars (15,16) to the end supports in Step 5A using washers (F) and bolts (D) as shown in the illustration. Ensure the slots on the cross bars are facing inward as shown in the illustration. Be sure to tighten all bolts firmly using wrench (L).

Step 8A

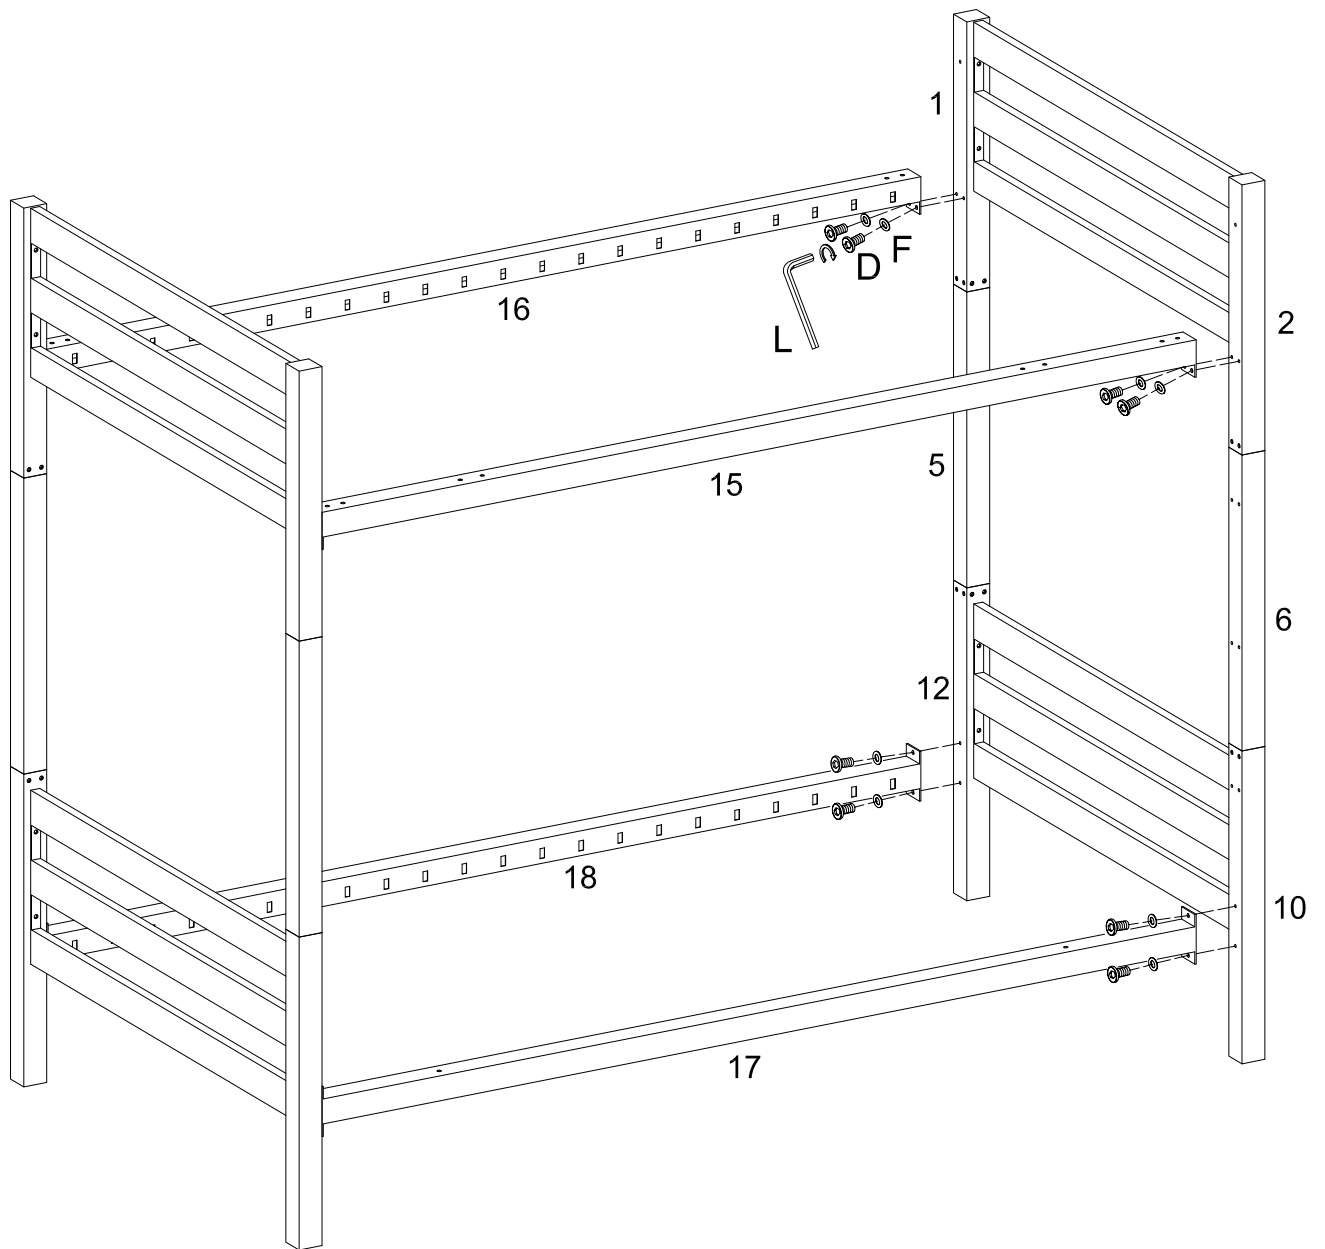


Attach another end supports assembled in Step 6A using washers (F) and bolts (D) as shown in the illustration. Ensure the slots on the cross bats are facing inward as step 8A. Be sure to tighten all bolts firmly using wrench (L).

Step 9A

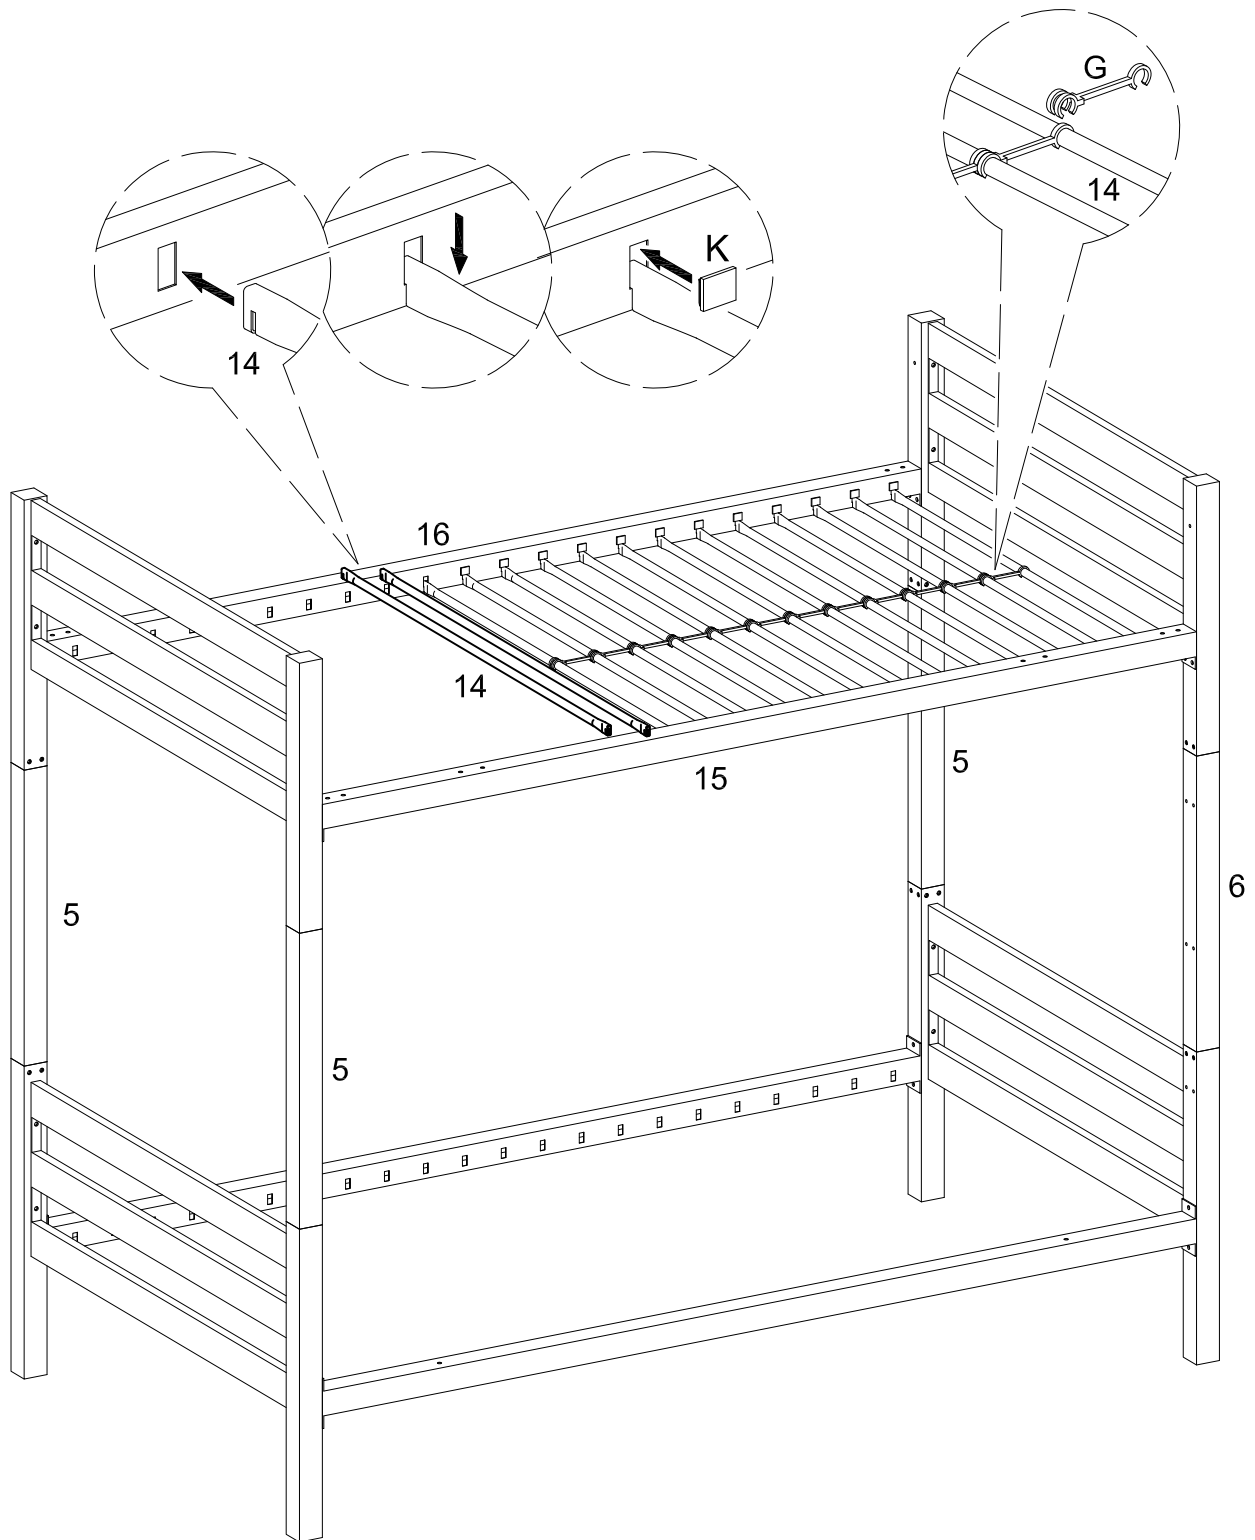


Insert mattress support bars (14) into the slots on the cross bars as shown in the illustration. Snap plastic tab locks (K) into each slot to lock the mattress support bars in place. Snap plastic links (G) into the middle of the mattress support bars as shown in the illustration.

Step 10A

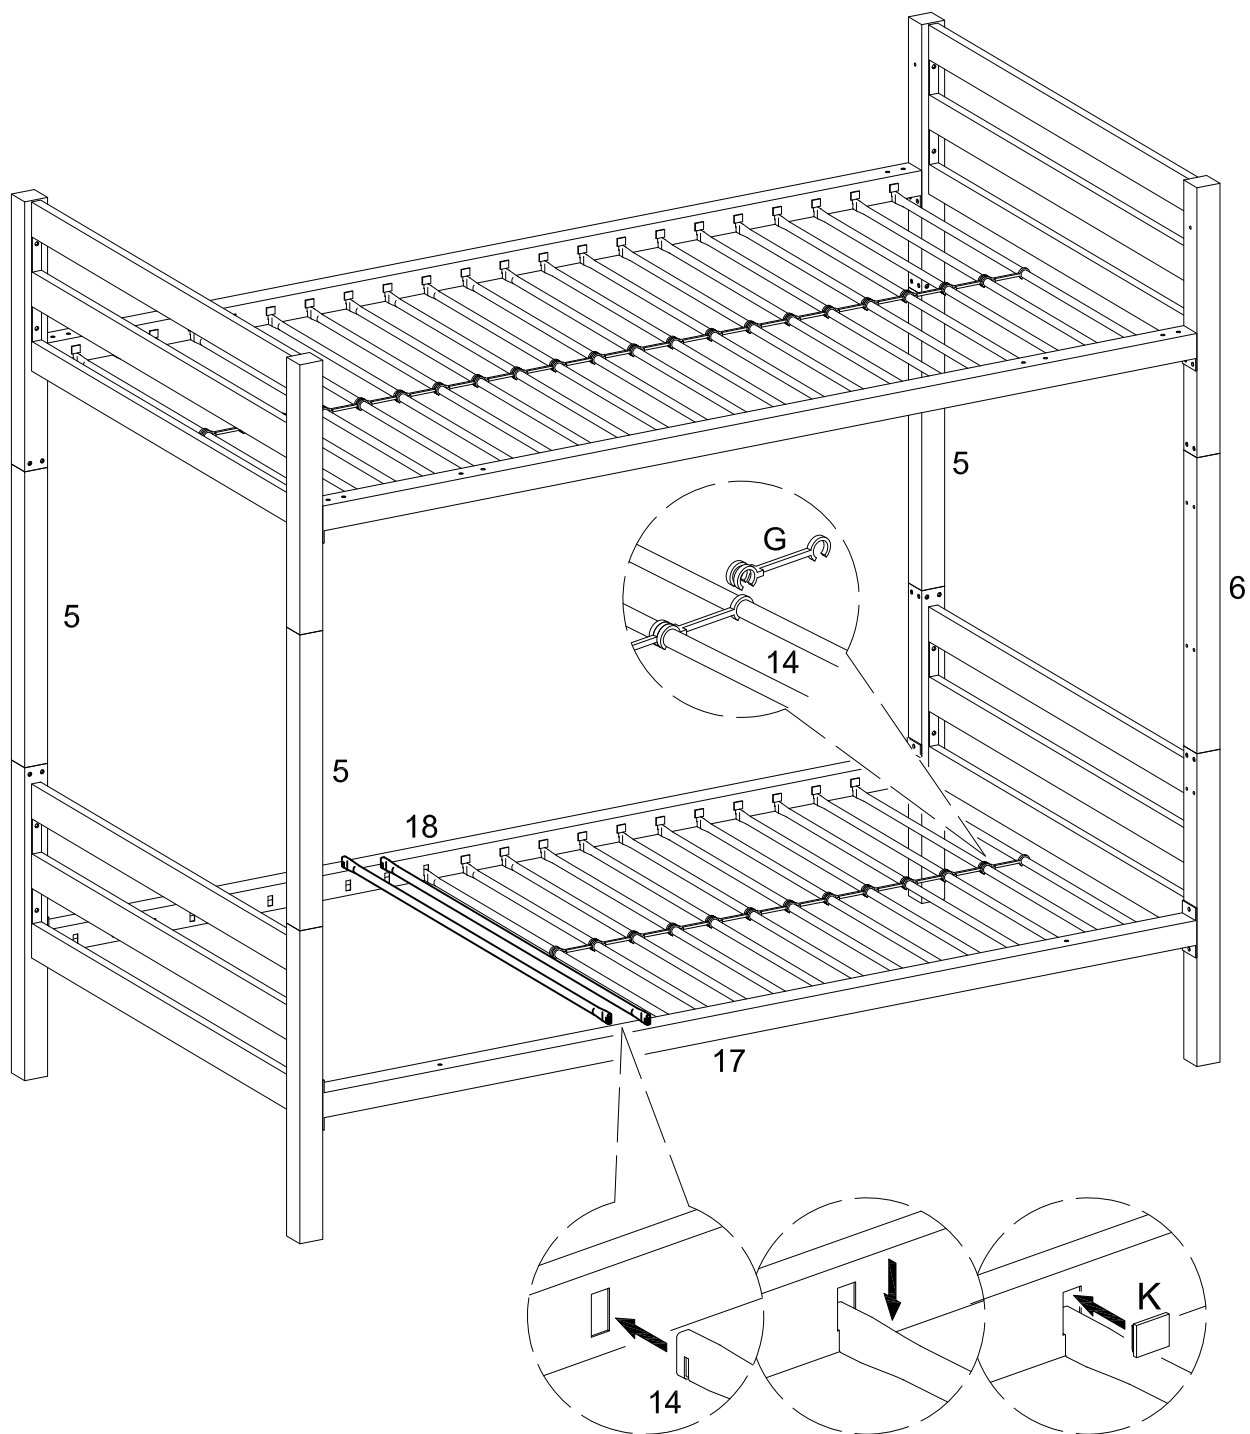


Insert mattress support bars (14) into the slots on the cross bars as shown in the illustration. Snap plastic tab locks (K) into each slot to lock the mattress support bars in place. Snap plastic links (G) into the middle of the mattress support bars as shown in the illustration.

Step 11A

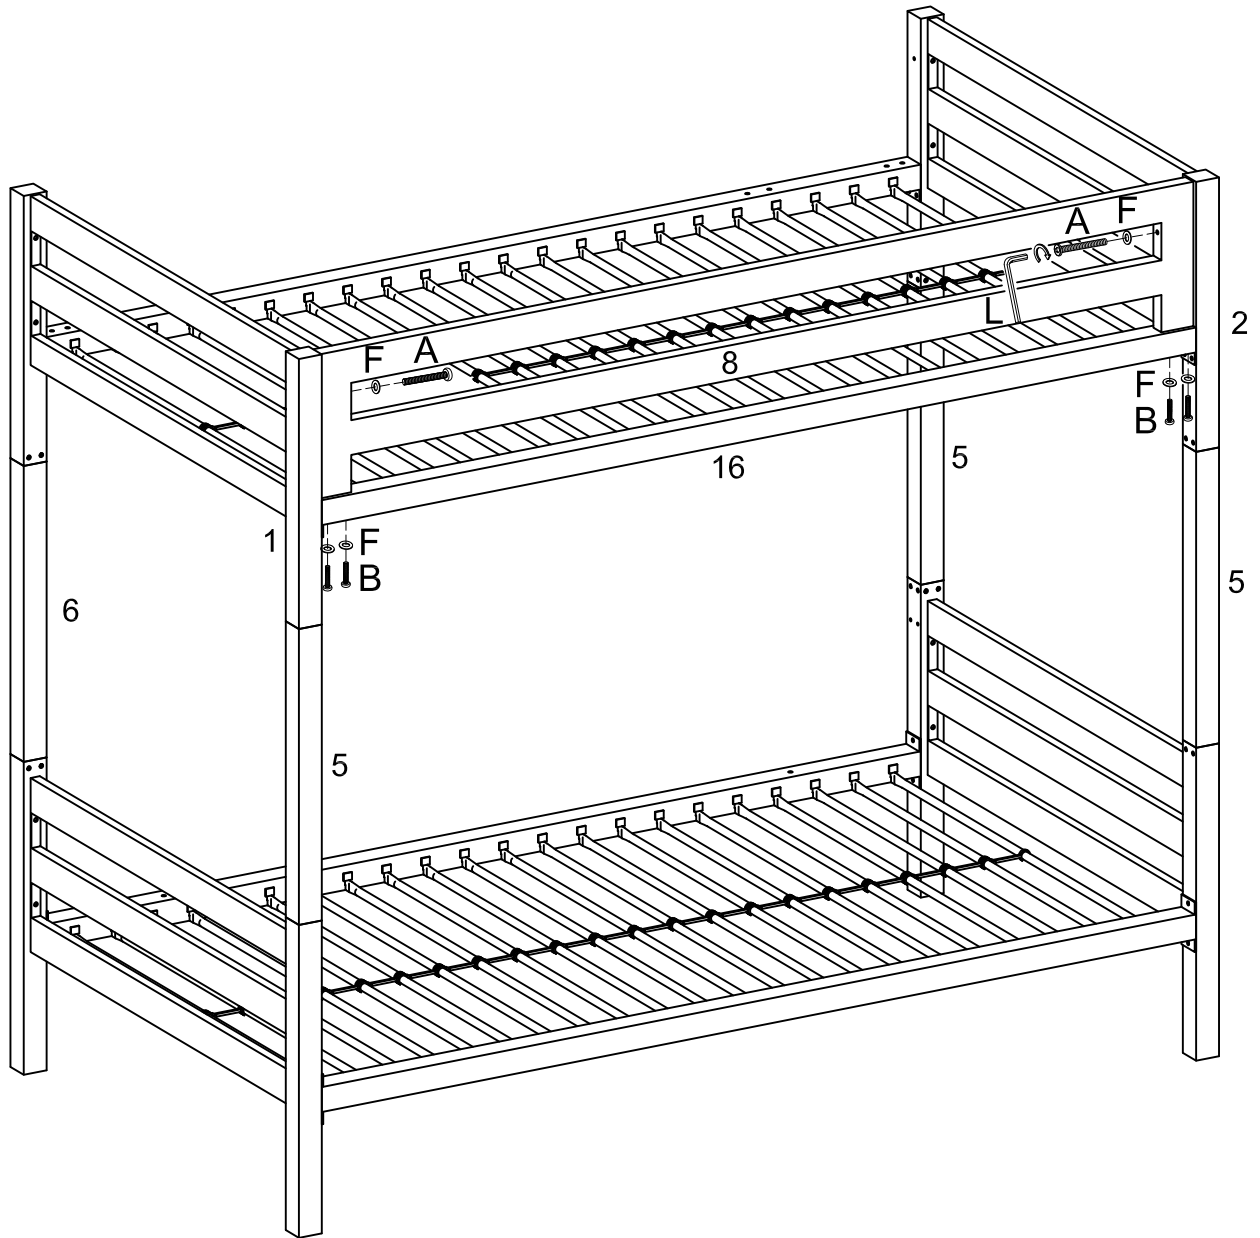

Attach back upper guardrail (8) to the back frame support beams using bolts (A) and washer (F) as shown in the illustration. Attach guardrail to cross bar (16) using bolts (B) and washers (F) , tighten with wrench (L). Be sure to tighten all bolts firmly.

Step 12A

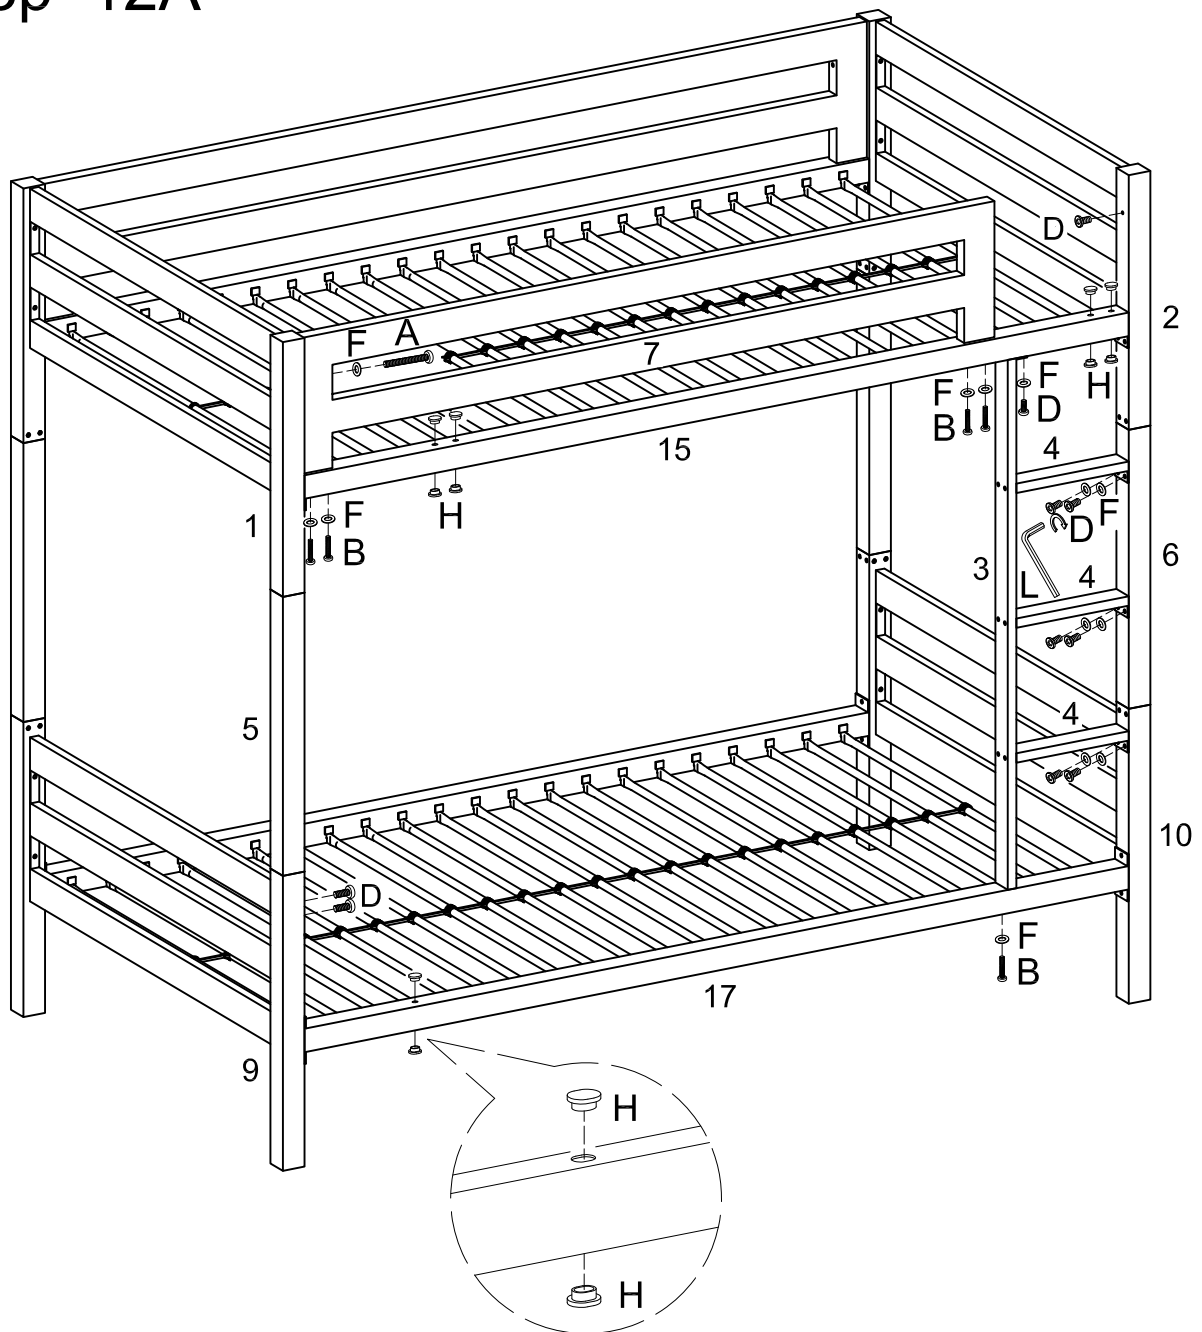

Attach ladder frame assembly to the upper cross bar on the left side using bolt (D) and washer (F) as shown in the illustration.

Attach ladder support posts to the lower cross bar using bolts (B) and washer (F) as shown in the illustration.


Attach open guardrail (7) to the upper cross bar (15) using bolts (B) and washer (F), then attach upper guardrail (7) to the support post using bolt (A) and washer (F) as diagram shown. Insert bolts (D) to support (2,9) using wrench (L). Be sure to tighten all bolts firmly.

Place plastic plugs (H) into the holes in the front cross bars as shown in the illustration. Snap plastic links (G) into the middle of the mattress support bars as shown in the illustration.

Note the ladder and open guardrail on the right side.


OPTION A Final

Step 5B

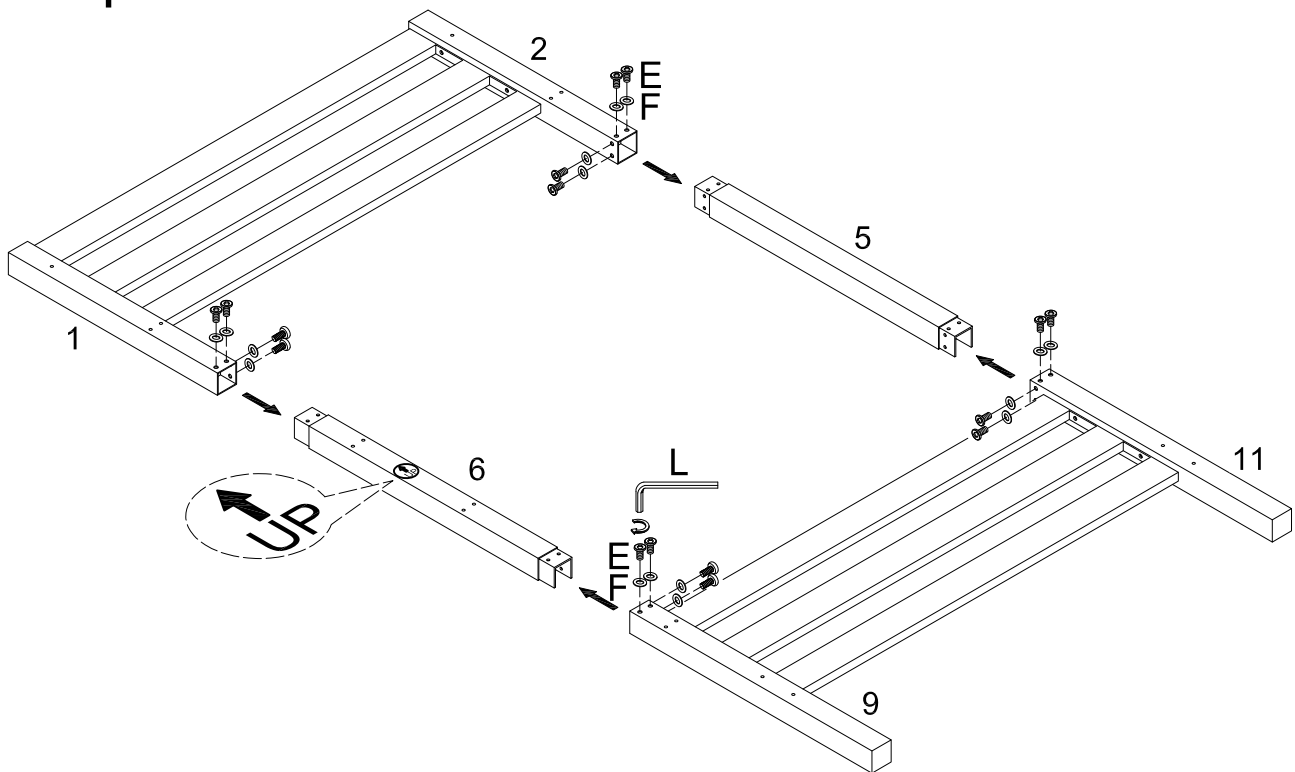


Assembly the three support posts by combining parts (1,6) and (9) ; then parts (2,5) and (11) as shown in the illustration. Secure these parts together using bolts (E) and washers (F). Be sure to tighten firmly using wrench (L).

Step 6B

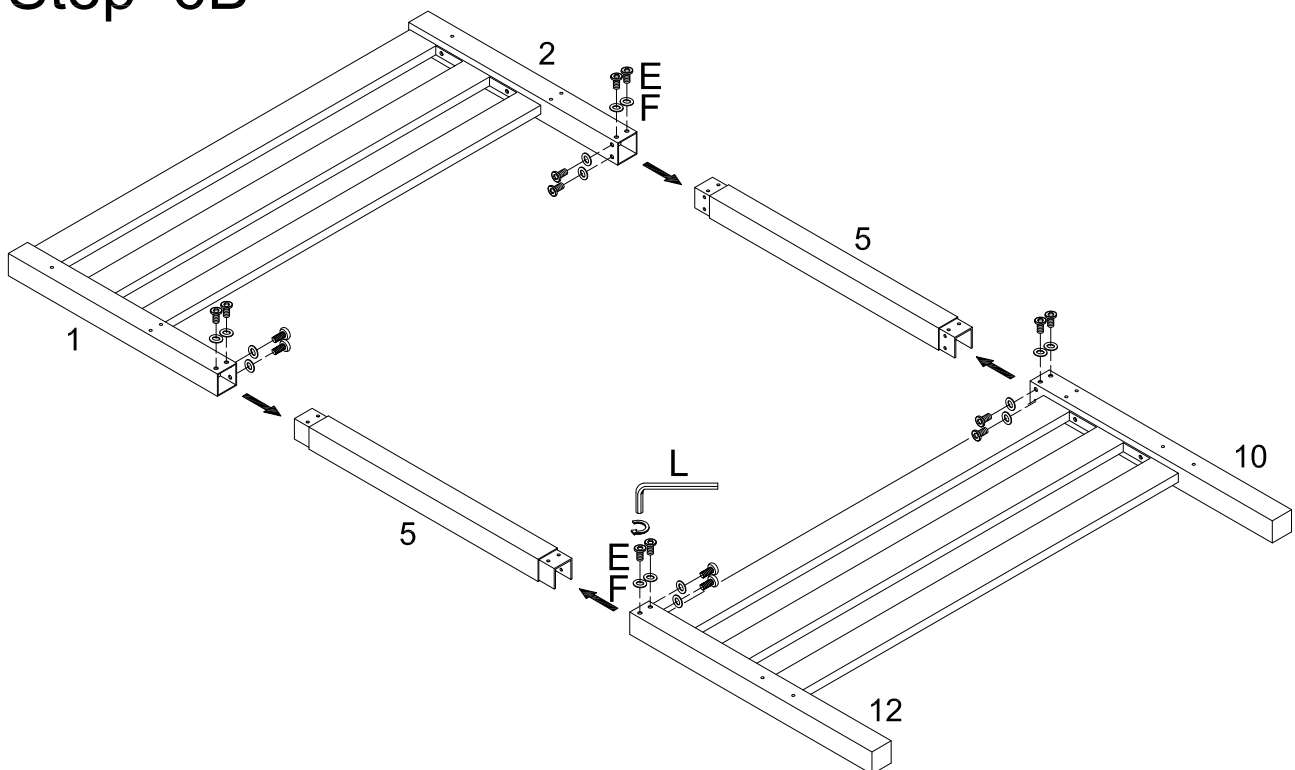


Assembly the three support posts by combining parts (1,5) and (12) ; then parts (2,5) and (10) as shown in the illustration. Secure these parts together using bolts (E) and washers (F). Be sure to tighten firmly using wrench (L).

Step 7B

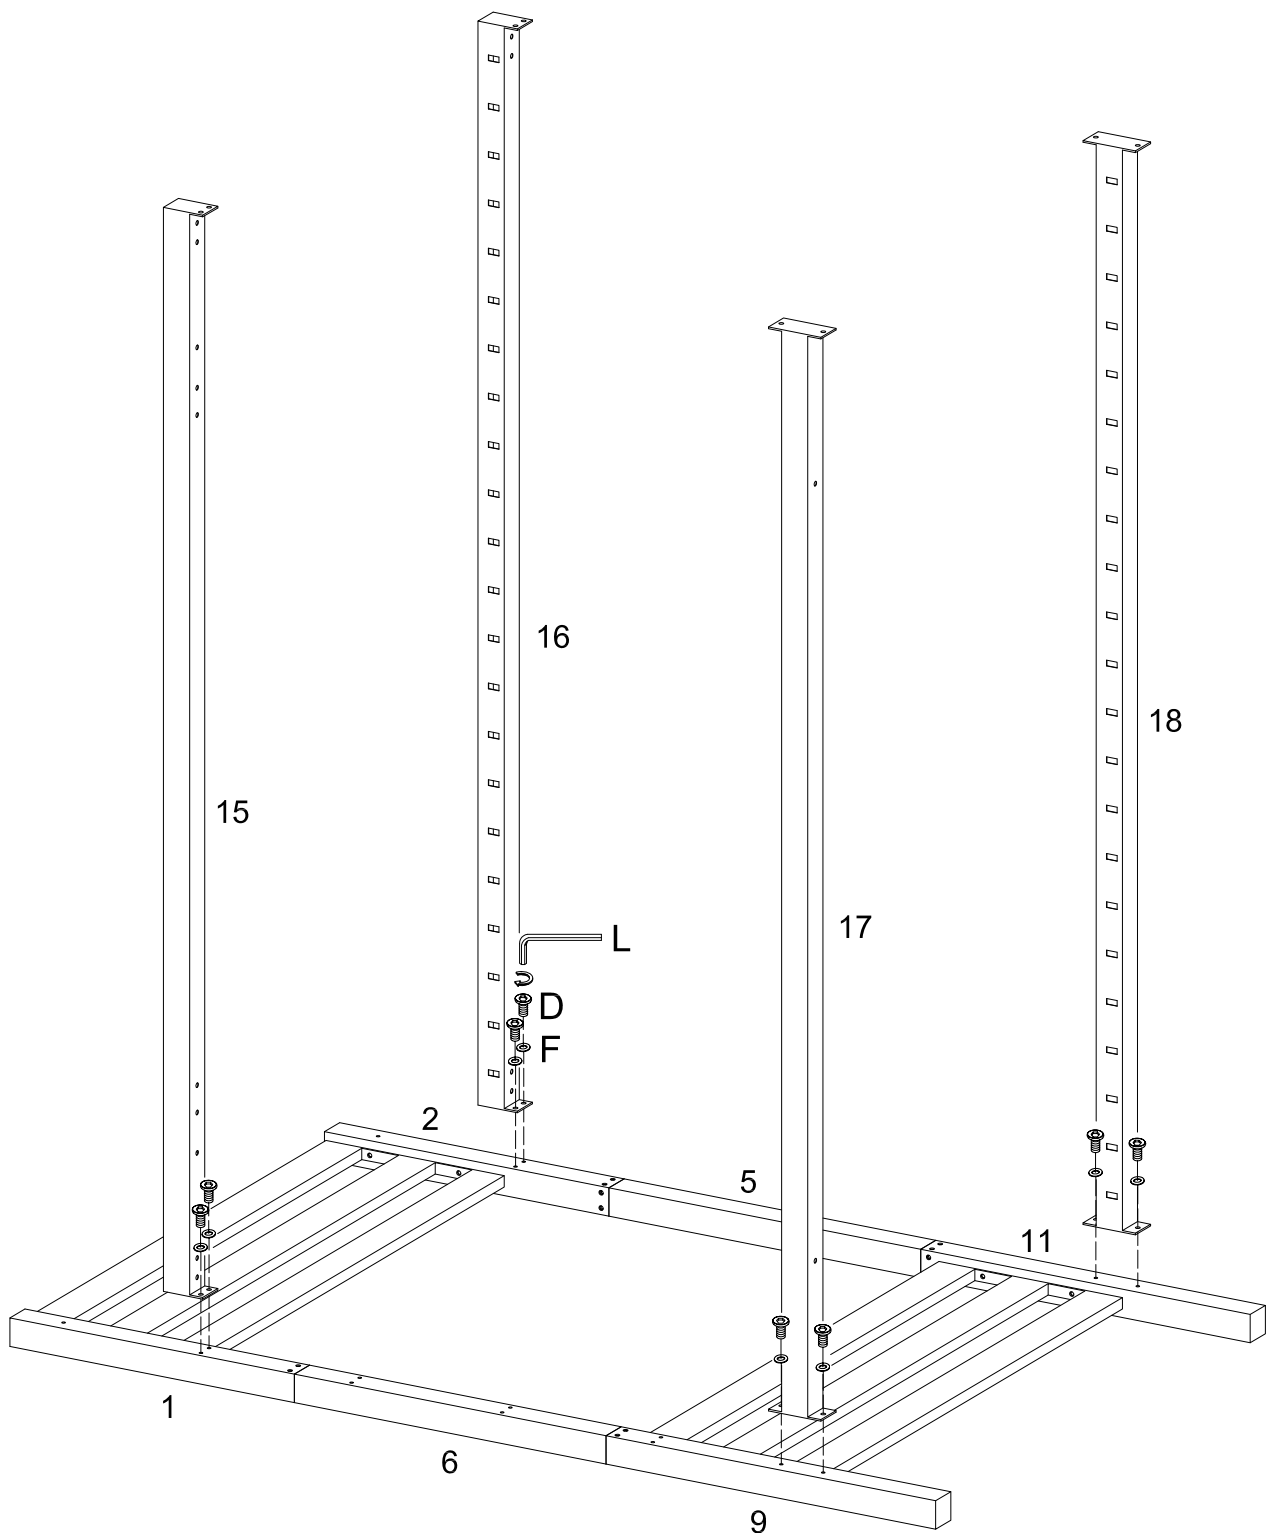


Attach lower cross bars (17,18) and upper cross bars (15,16) to the end supports in Step 5B using washers (F) and bolts (D) as shown in the illustration. Ensure the slots on the cross bars are facing inward as shown in the illustration. Be sure to tighten all bolts firmly using wrench (L).

Step 8B

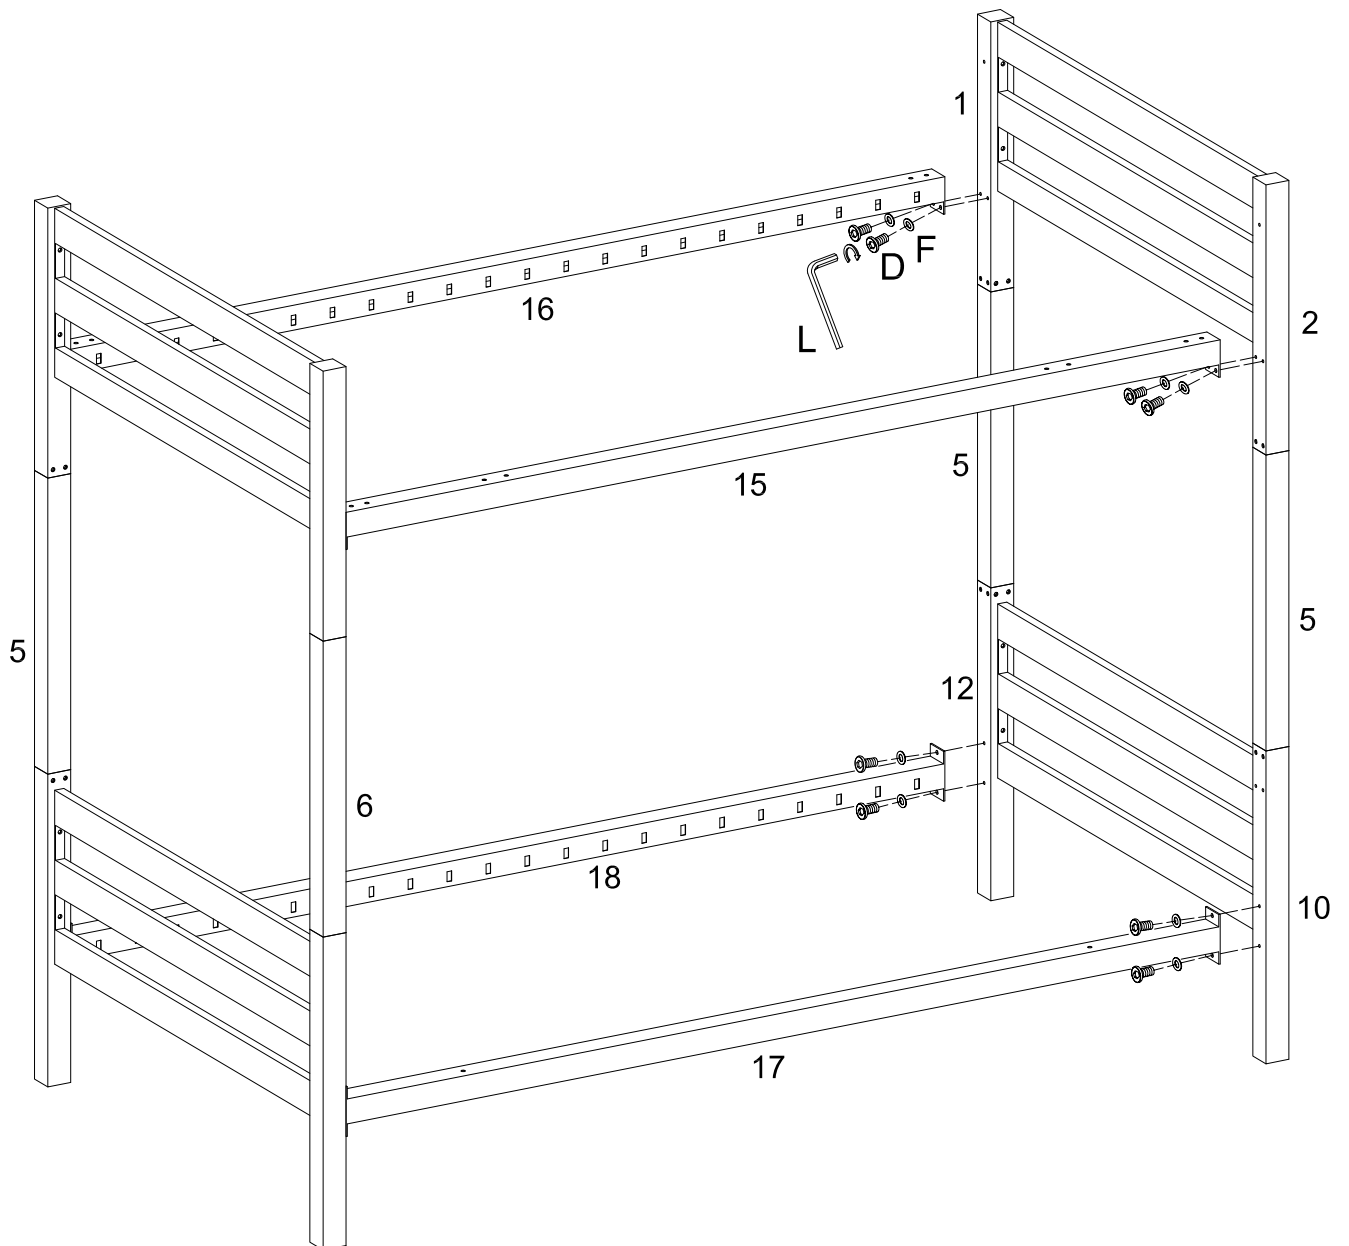


Attach another end supports assembled in Step 6B using washers (F) and bolts (D) as shown in the illustration. Ensure the slots on the cross bats are facing inward as step 8B. Be sure to tighten all bolts firmly using wrench (L).

Step 9B

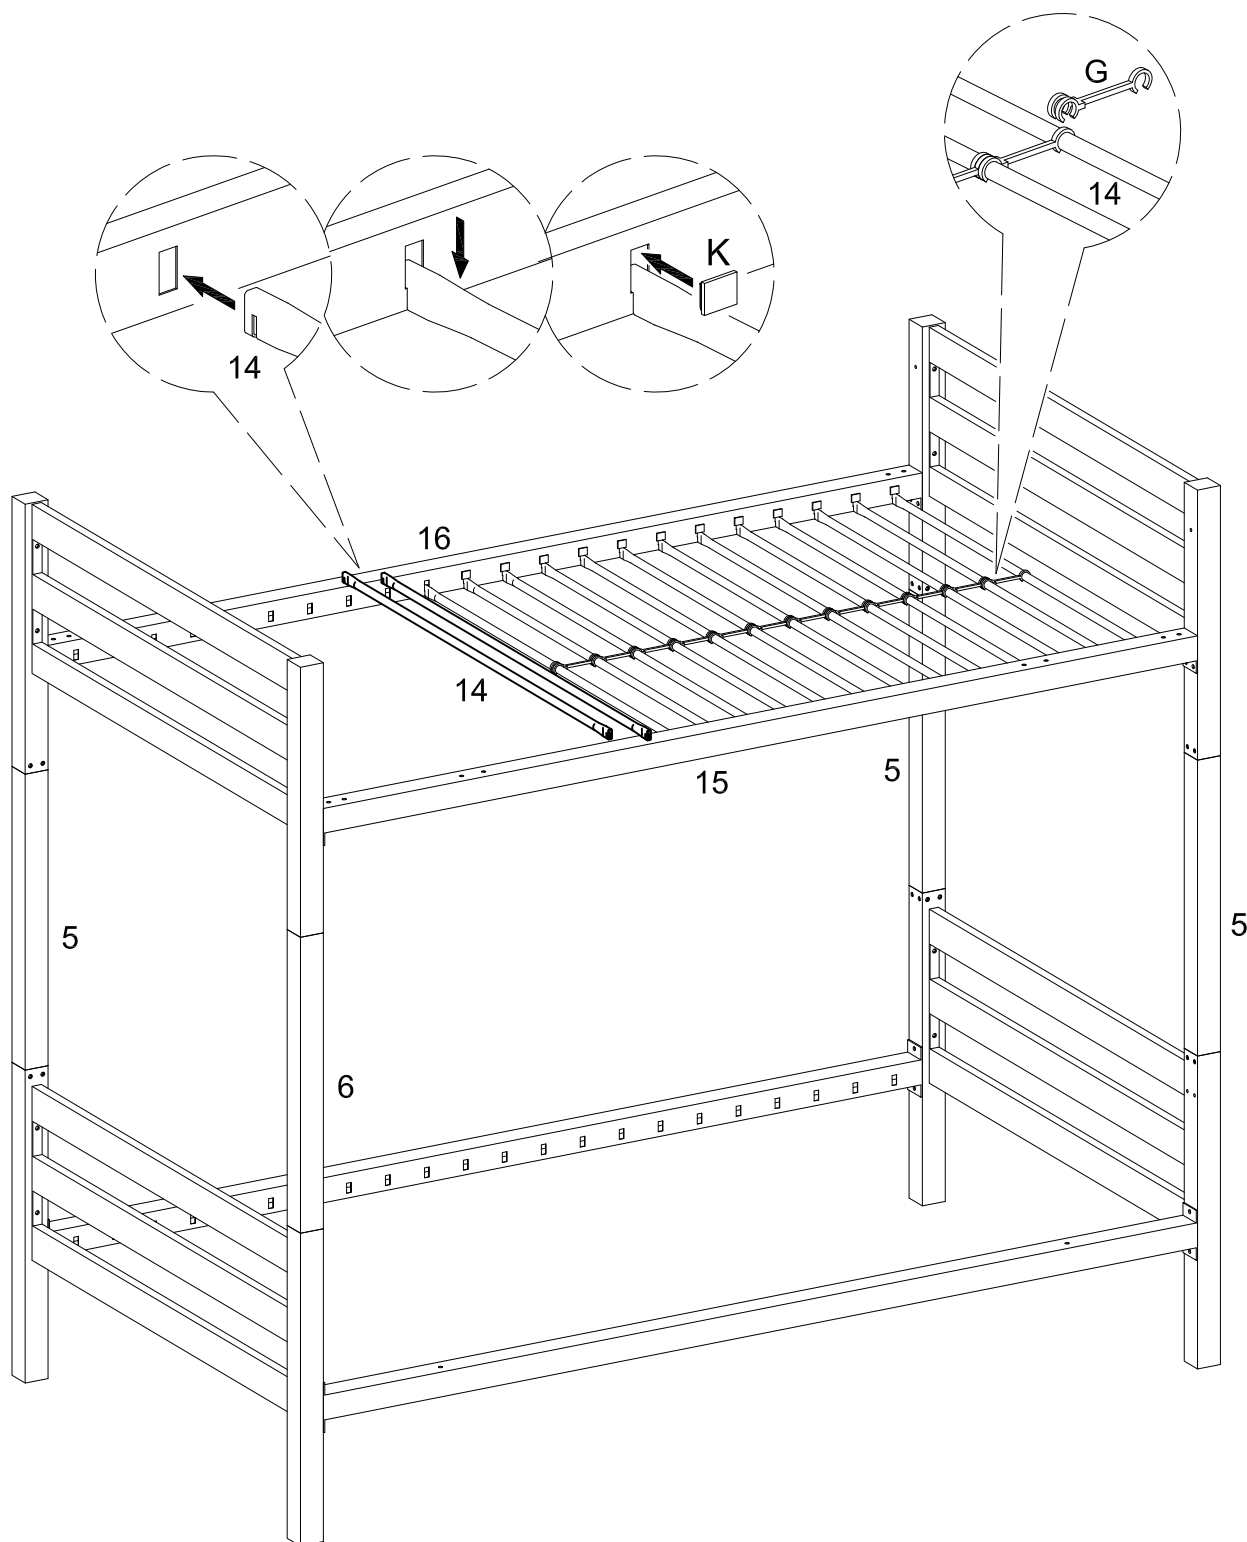


Insert mattress support bars (14) into the slots on the cross bars as shown in the illustration. Snap plastic tab locks (K) into each slot to lock the mattress support bars in place. Snap plastic links (G) into the middle of the mattress support bars as shown in the illustration.

Step 10B

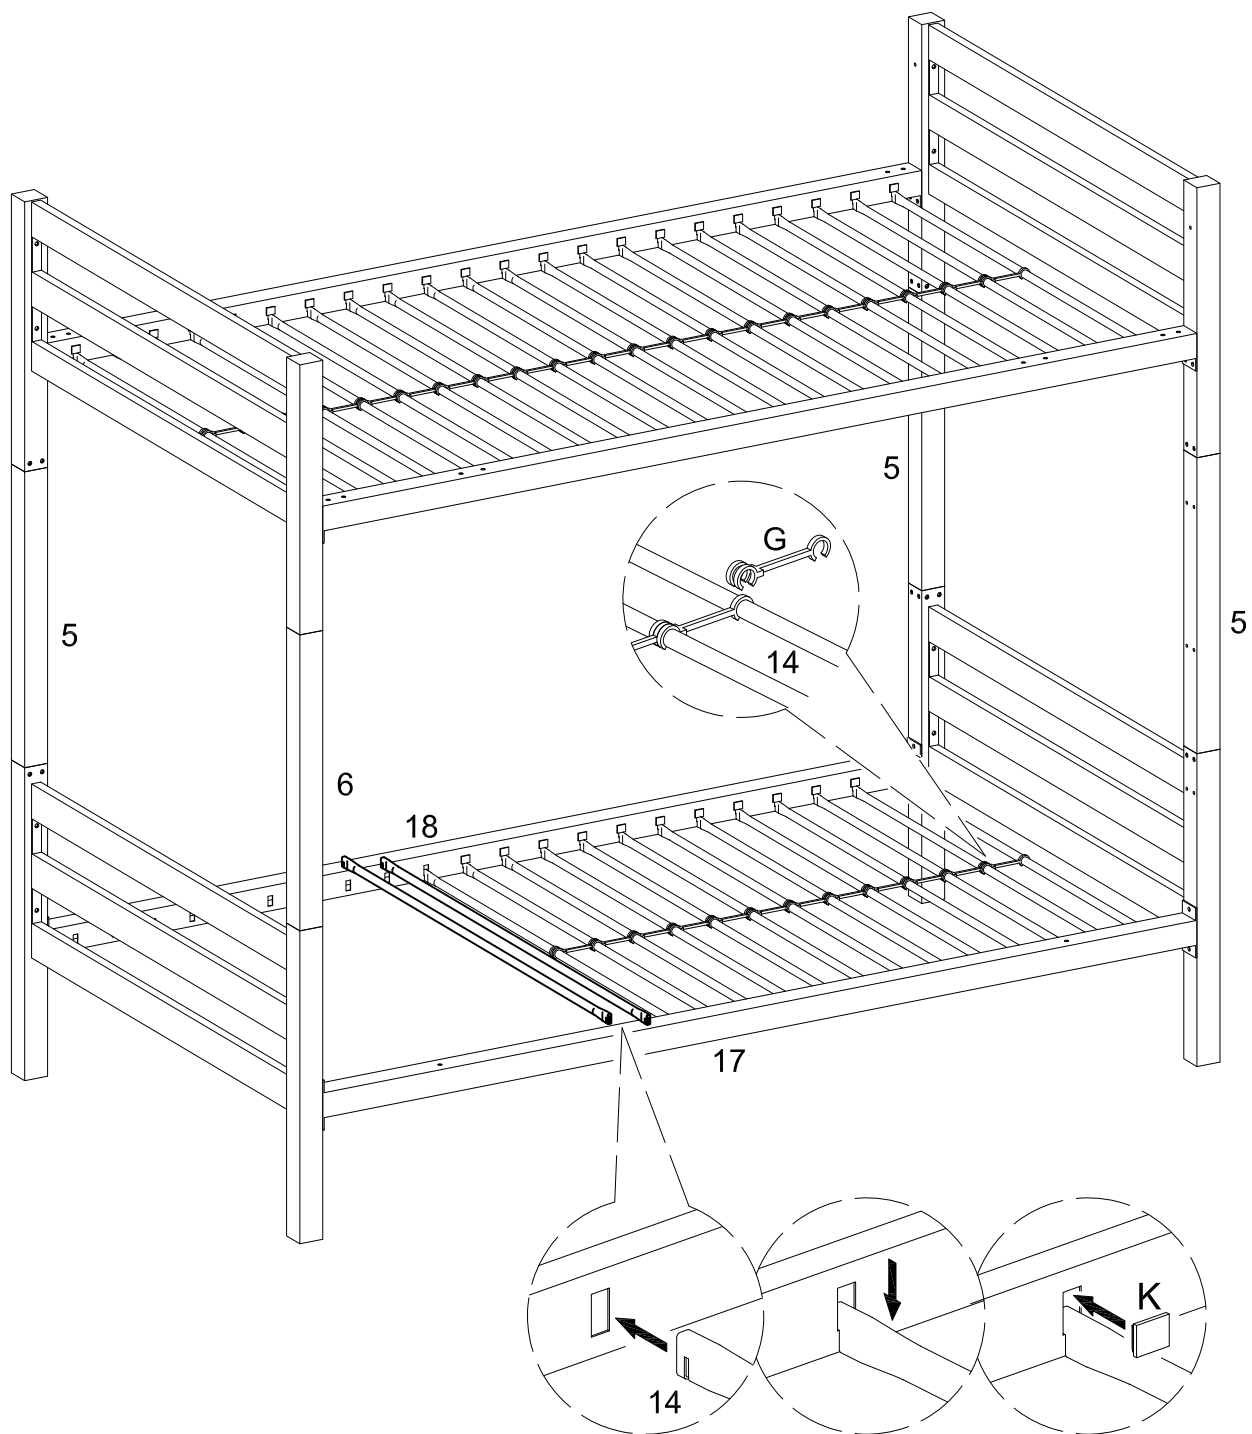


Insert mattress support bars (14) into the slots on the cross bars as shown in the illustration. Snap plastic tab locks (K) into each slot to lock the mattress support bars in place. Snap plastic links (G) into the middle of the mattress support bars as shown in the illustration.

Step 11B

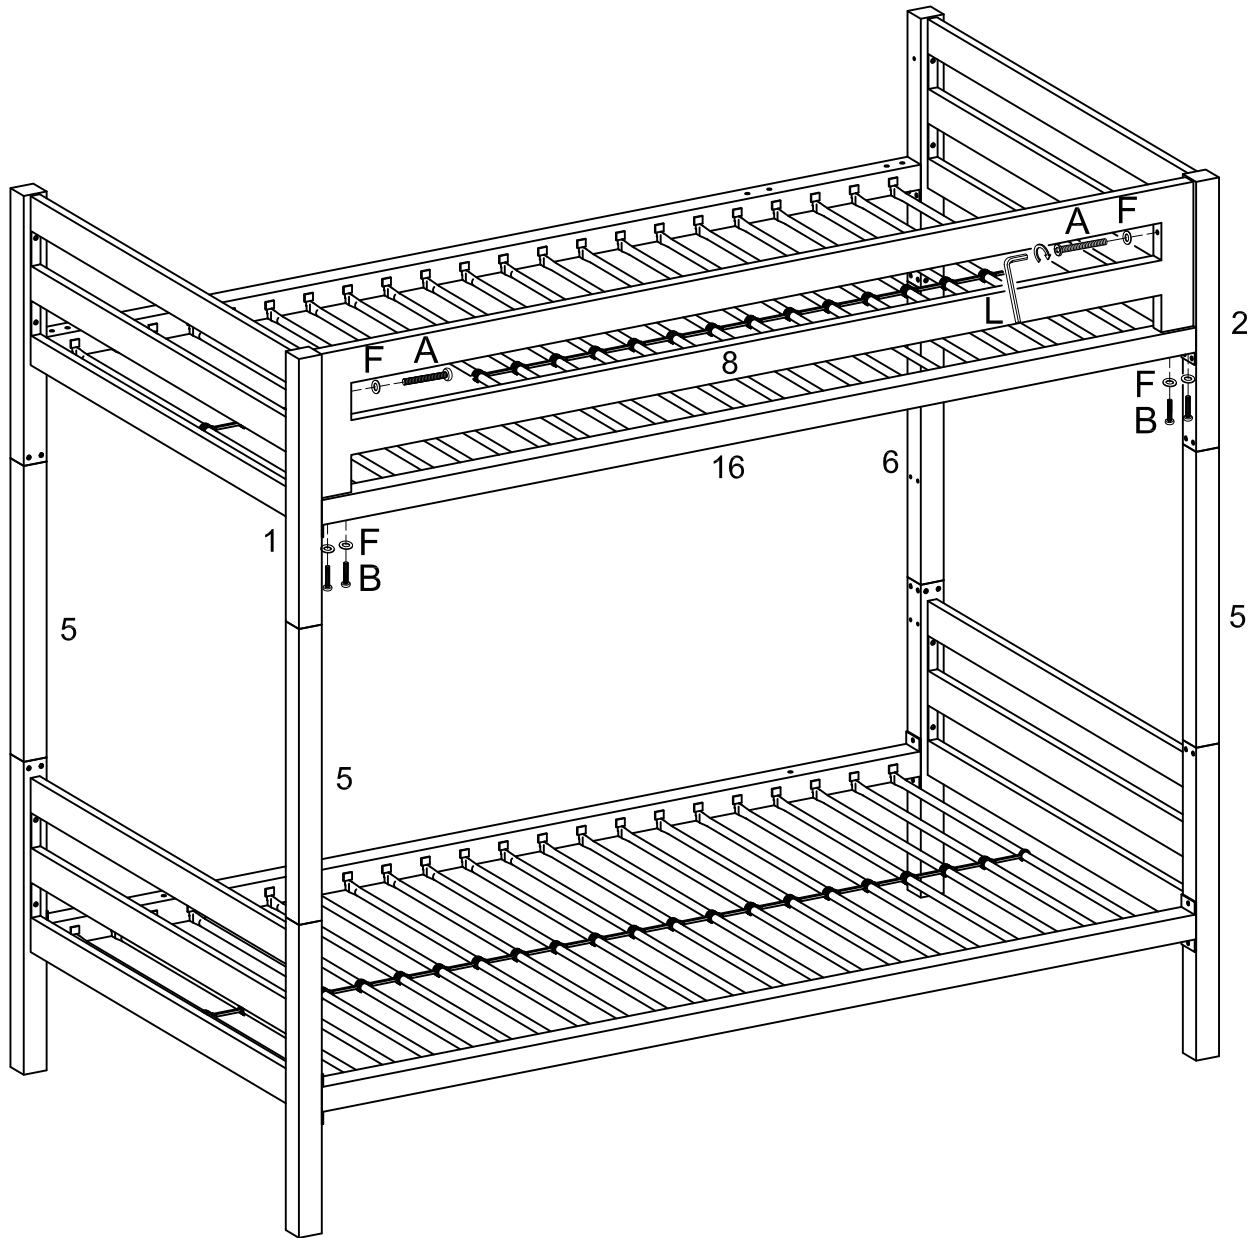

Attach back upper guardrail (8) to the back frame support beams using bolts (A) and washer (F) as shown in the illustration. Attach guardrail to cross bar (16) using bolts (B) and washers (F) , tighten with wrench (L). Be sure to tighten all bolts firmly.

Step 12B

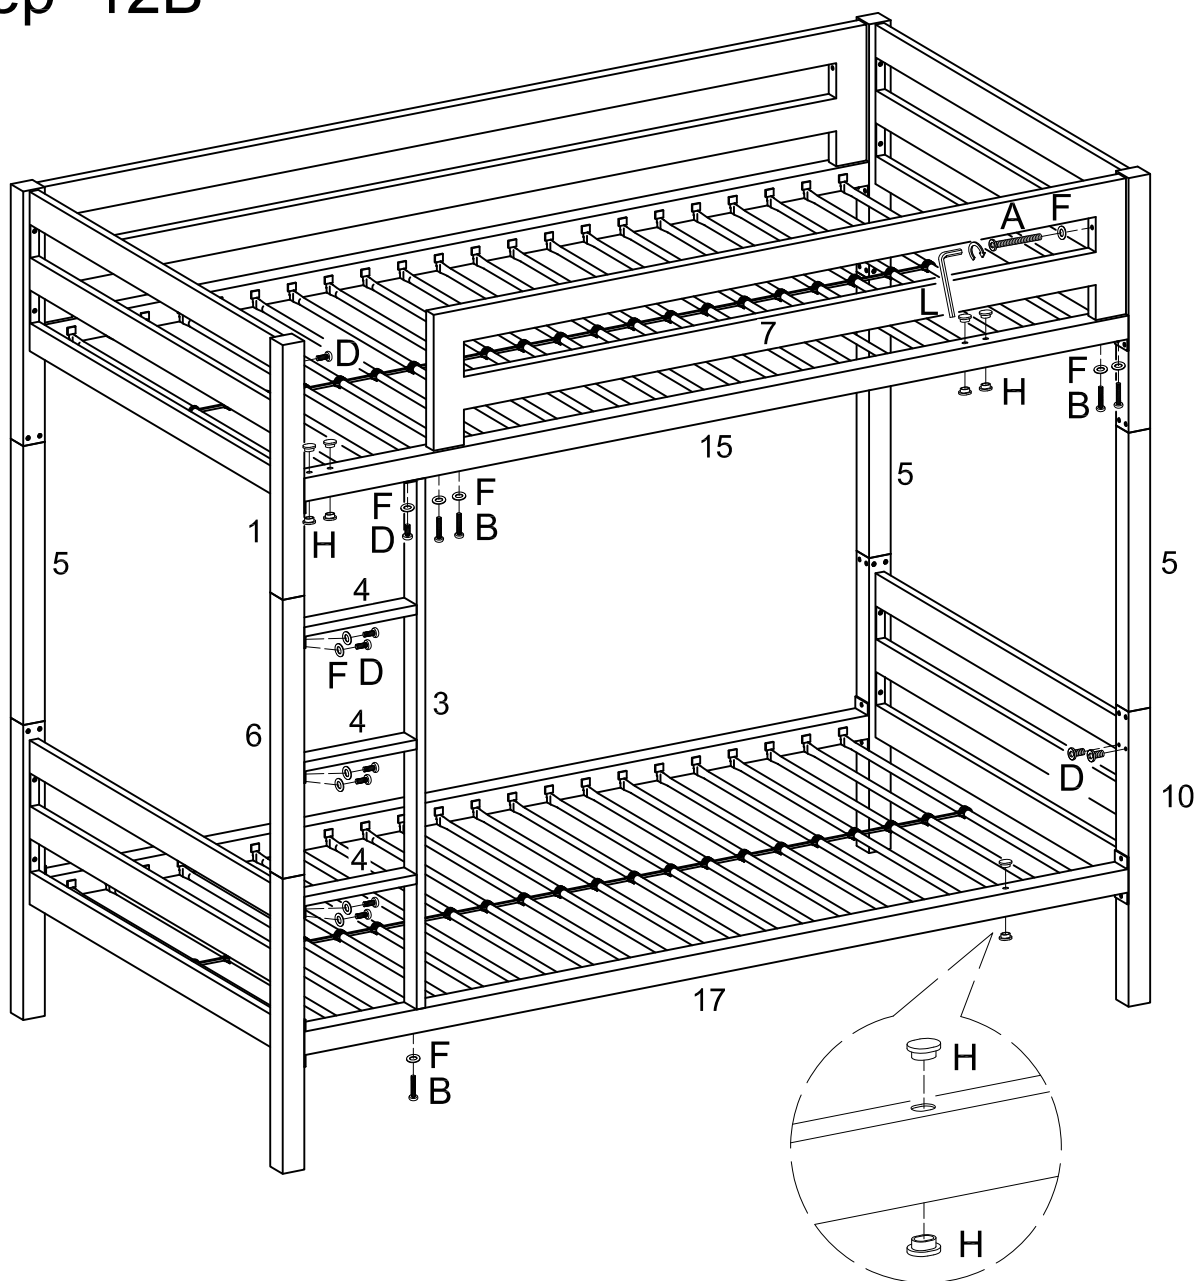

Attach ladder frame assembly to the upper cross bar on the right side using bolt (D) and washer (F) as shown in the illustration.

Attach ladder support posts to the lower cross bar using bolts (B) and washer (F) as shown in the illustration.




Attach open guardrail (7) to the upper cross bar (15) using bolts (B) and washer (F), then attach upper guardrail (7) to the support post using bolt (A) and washer (F) as diagram shown. Insert bolts (D) to support (1,10) using wrench (L). Be sure to tighten all bolts firmly.

Place plastic plugs (H) into the holes in the front cross bars as shown in the illustration. Snap plastic links (G) into the middle of the mattress support bars as shown in the illustration.

Note the ladder and open guardrail on the left side.


OPTION B Final

Step 13

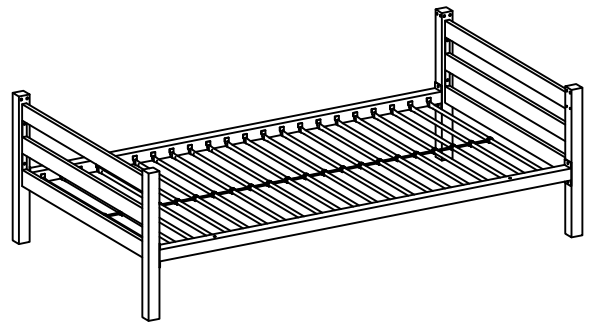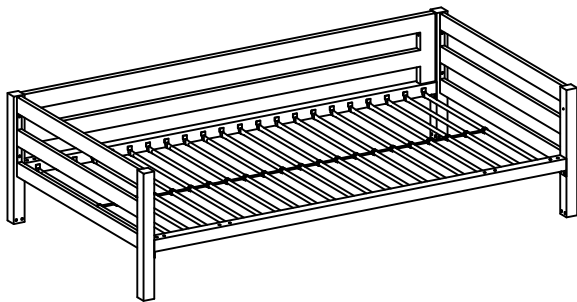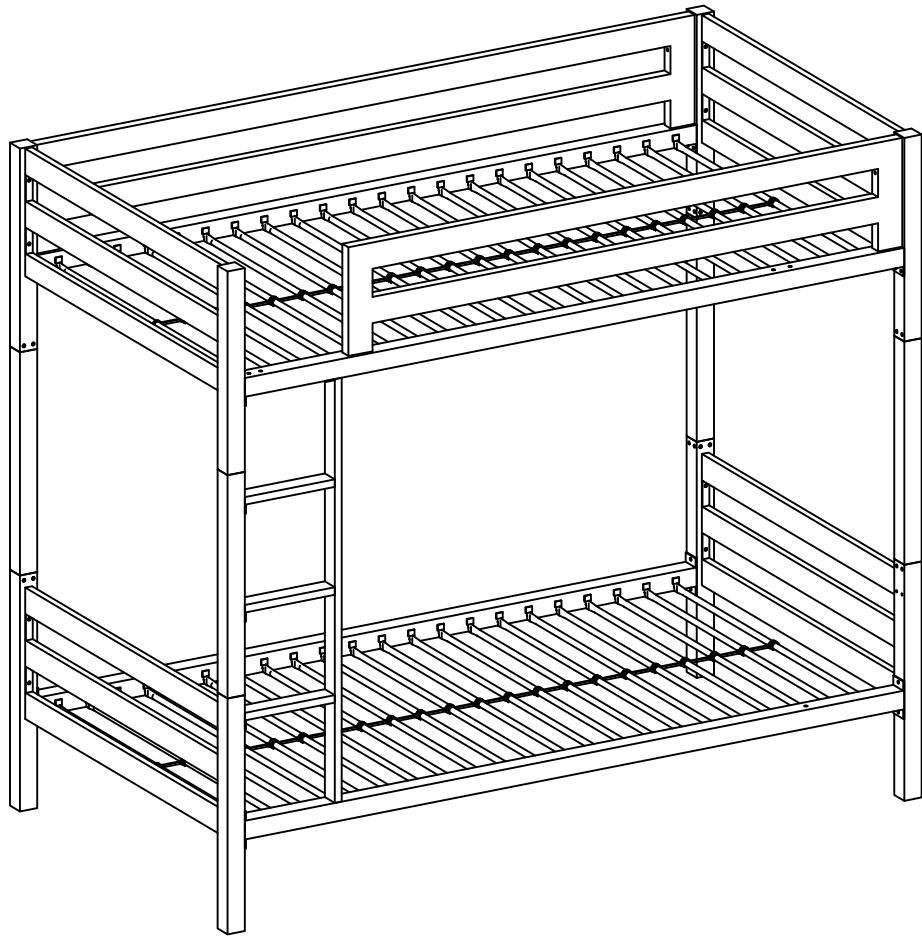


OPTION C

Step 14

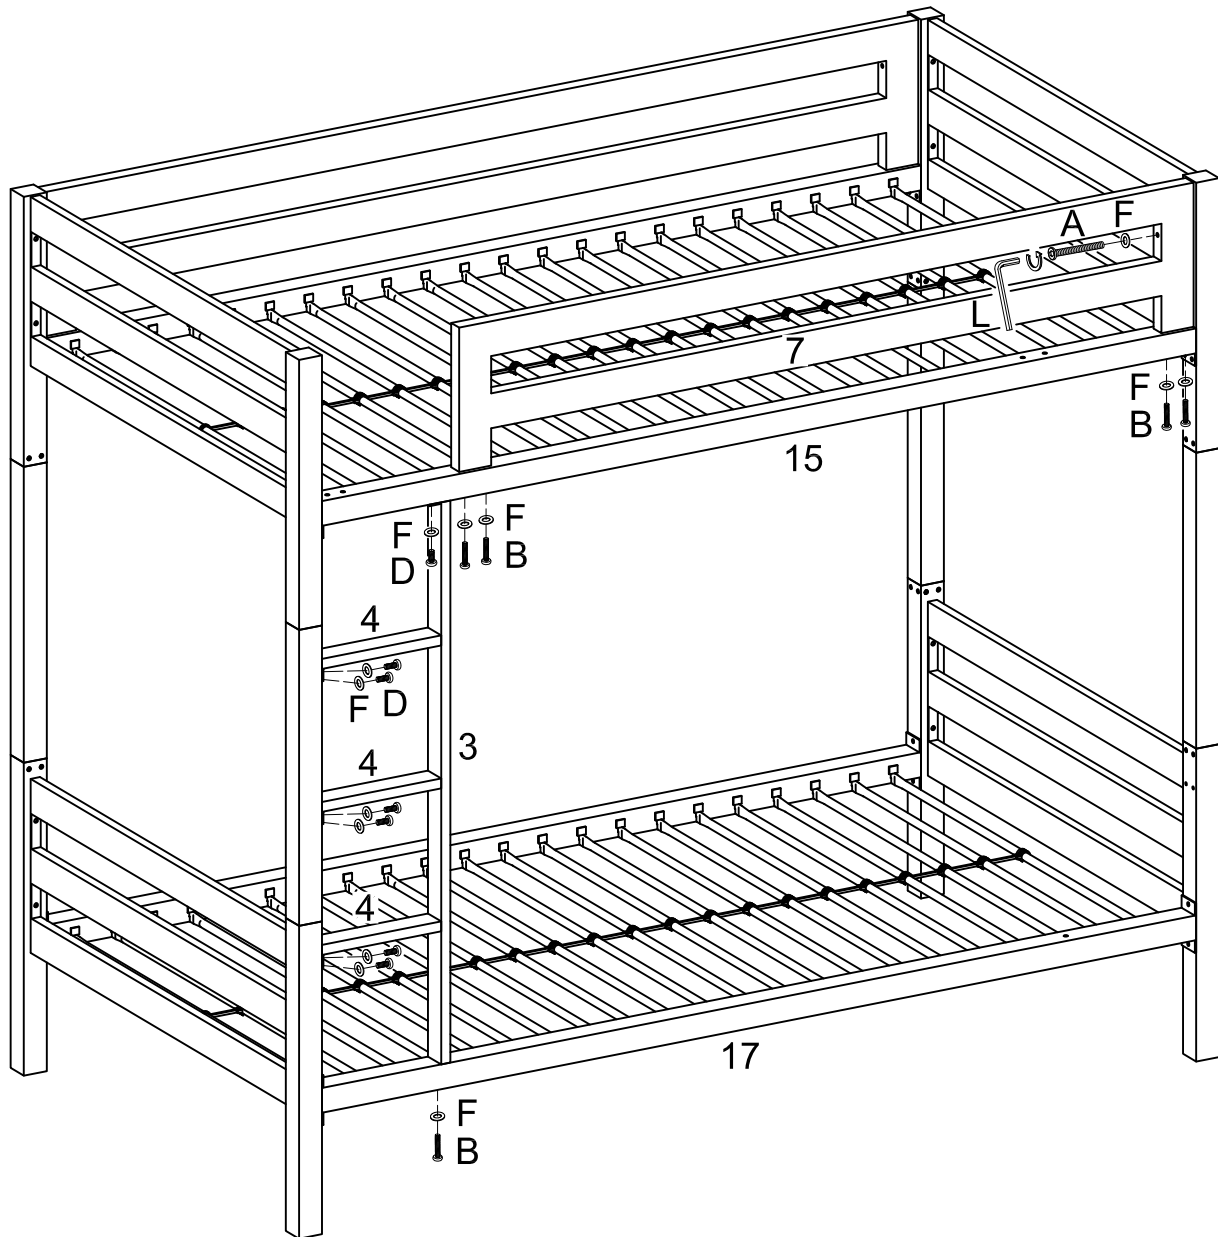


Loosen and remove the ladder support post (3), the ladder steps (4) and the open guardrail (7) from the bed frame.

Step 15

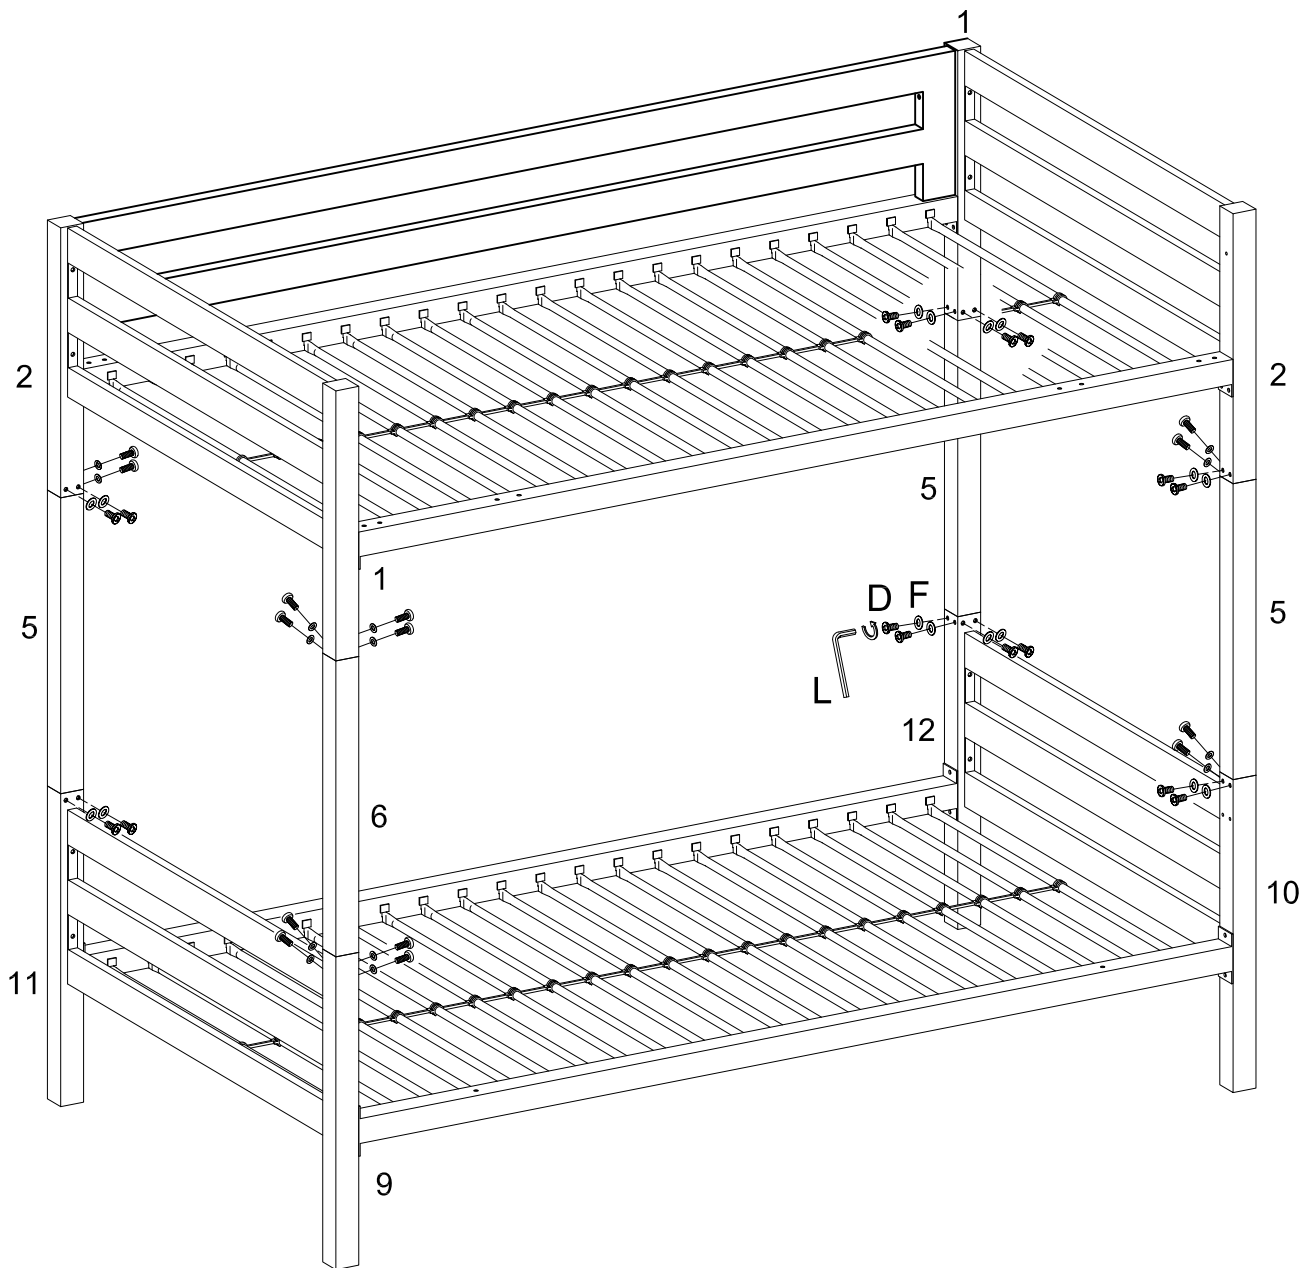


Loosen bolts where upper bunk connects with lower bunk.

Step 16

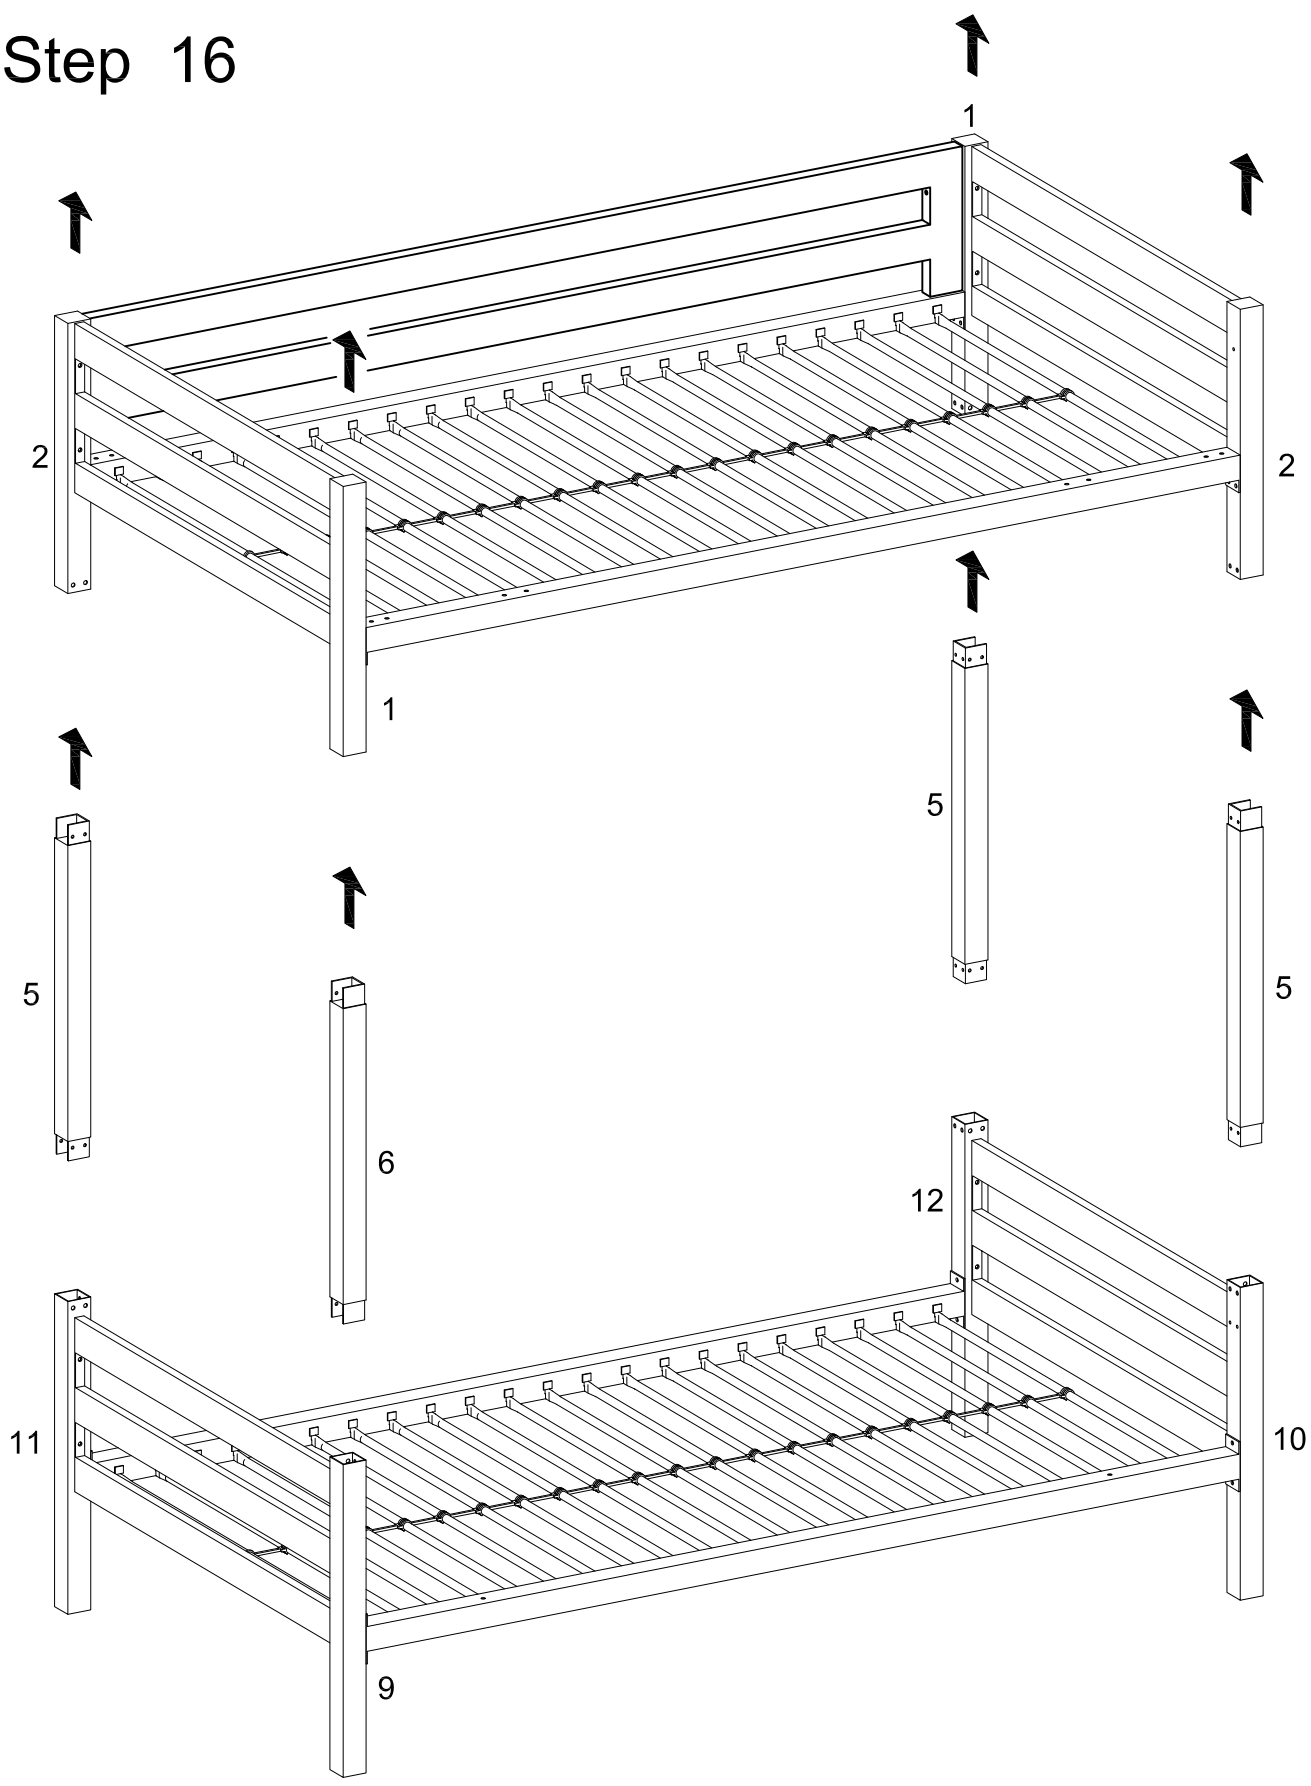


Lift and separate the bunks and the support posts (5,6,).

Step 17

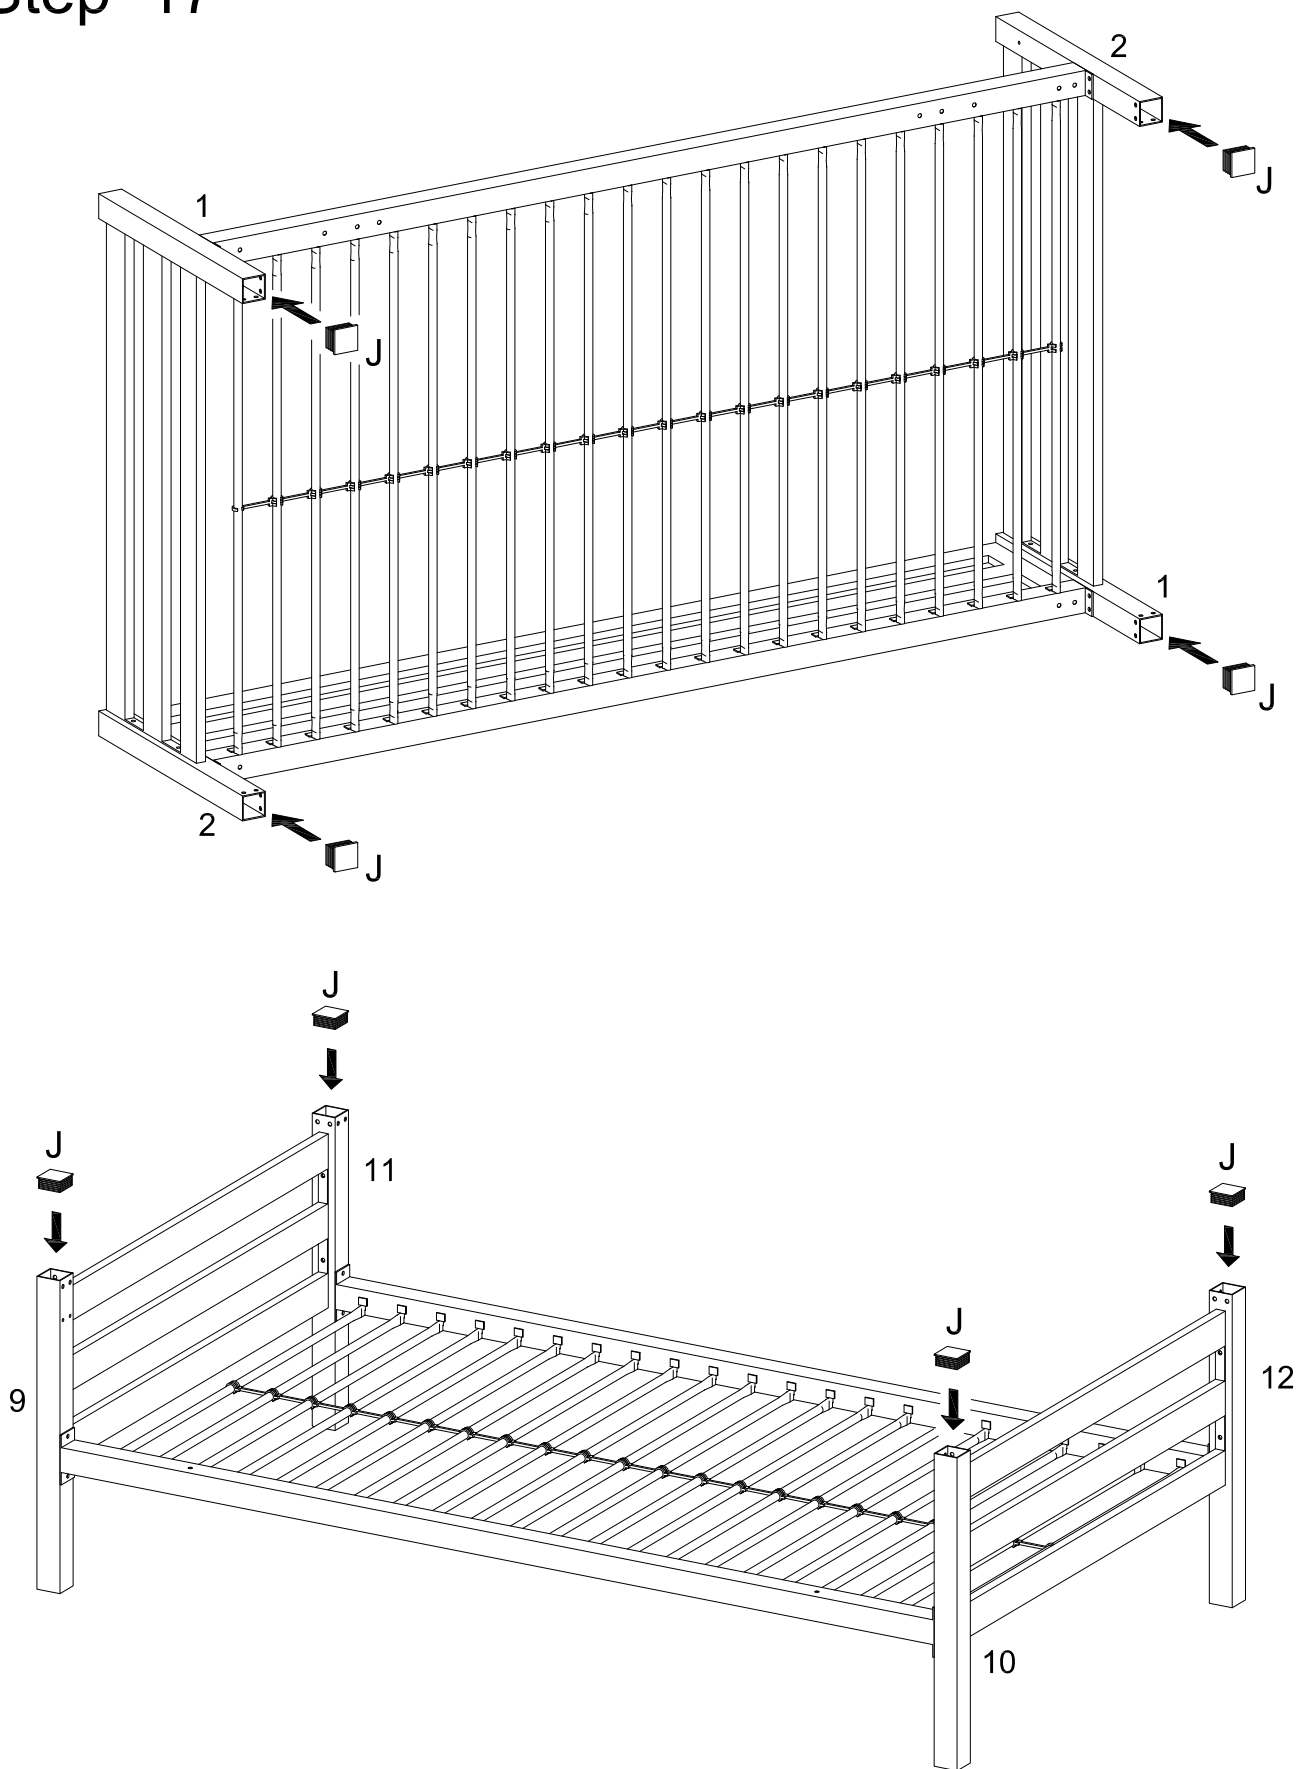

Attach plastic end caps (J) as shown in the illustration.

Step 18

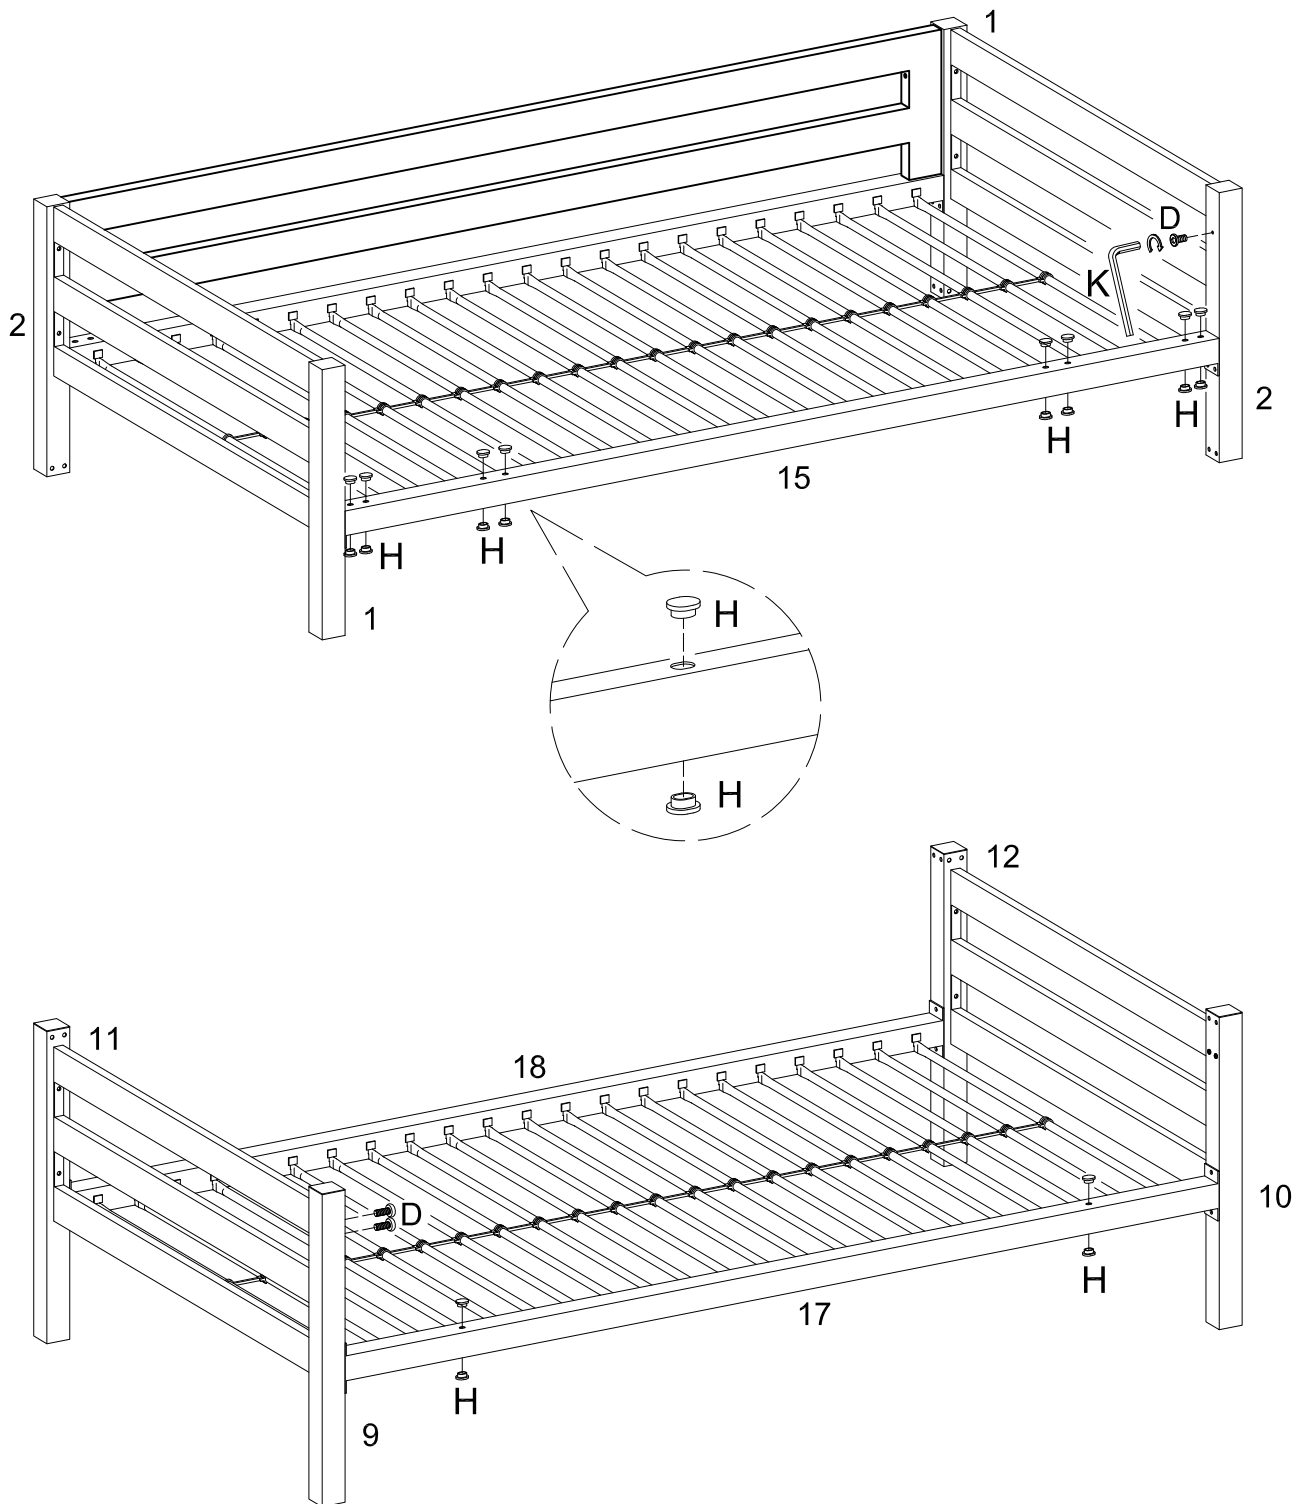

Place plastic plugs (H) into the holes in the front cross bars as shown in the illustration. Insert bolts (D) to support (2,9) using wrench (L).

OPTION C Final